

PHILIPS SERVICE


VKR 9550

Netzteil... SBC 5406

Explosionszeichnung

Stückliste


1-2 CABINET ASSEMBLY

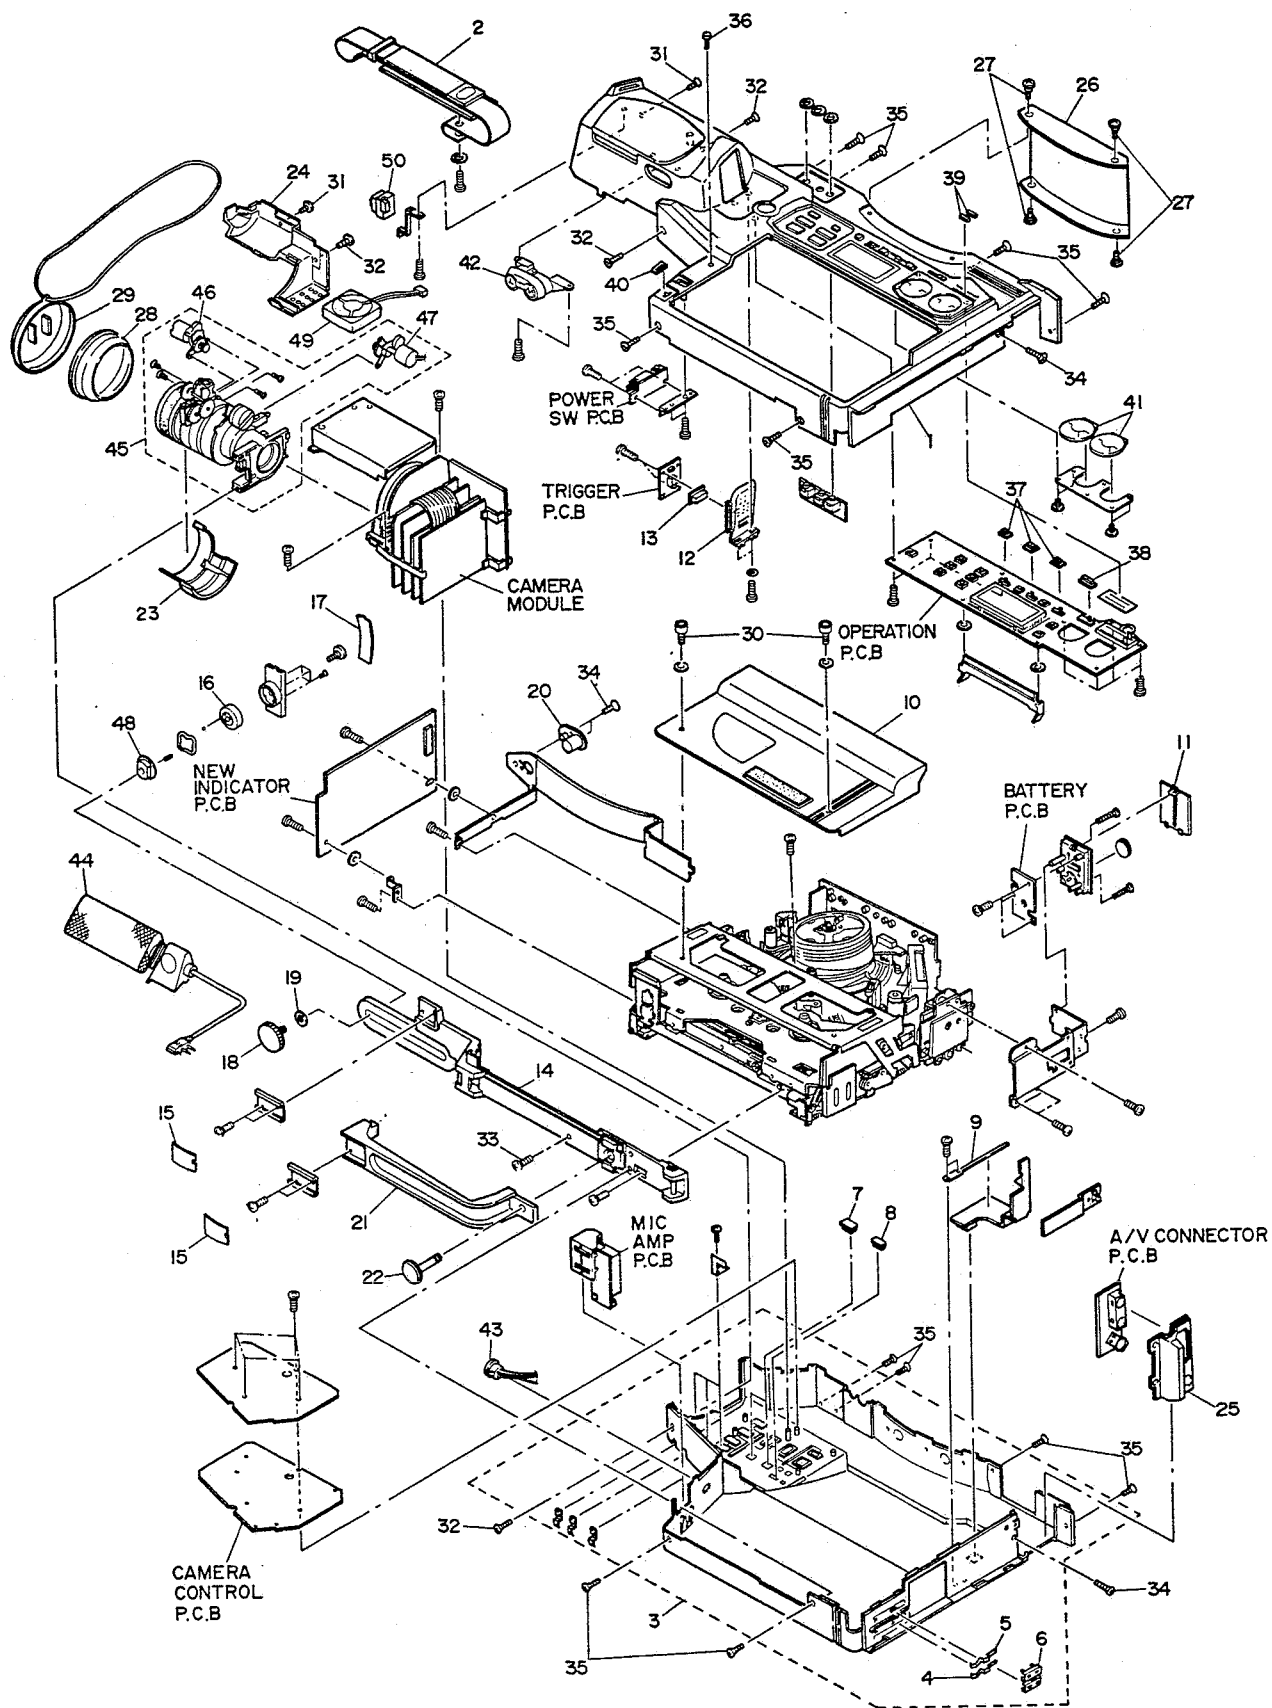



CABINET ASSEMBLY

Pos.	Parts code	Description
1	4822 432 92708	L COVER ASSY
2	4822 498 40569	HAND STRAP/00
2	4822 498 40571	HAND STRAP/02
3	4822 432 92709	R COVER ASSY/00
3	4822 432 92711	R COVER ASSY/02
4	4822 290 81422	BATT TERMINAL
5	4822 290 81423	BATT TERMINAL
6	4822 466 62013	BATT TERMINAL CASE
7	4822 410 61022	BUTTON VITC DIS/REC
8	4822 410 61023	BUTTON REC TIME
9	4822 492 70818	EJECT SP
10	4822 443 63207	CASSETTE COVER ASSY
11	4822 459 20576	BU BATT COVER
12	4822 432 92712	TRIGGER SW CASE
13	4822 410 61024	BUTTON TRIGGER
14	4822 464 50821	UPPER FRANGE ASSY
15	4822 492 70819	SP PLATE MIC
16	4822 362 20235	ROTATION BASE
17	4822 492 70821	SP PLATE EVF
18	4822 417 11129	KNURLING SCREW EVF
19	4822 532 52297	RUBBER RING
20	4822 358 50132	TRIPOD BASE ASSY
21	4822 498 40572	HANDLE
22	4822 417 11128	KNURLING SCREW HANDL
23	4822 432 92705	LENS COVER
24	4822 432 92706	LENS HOLDER
25	4822 459 11016	REAR PANEL/00
25	4822 459 11017	REAR PANEL/02
26	4822 466 62012	SHOULDER COVER
27	4822 502 13704	SCREW SHOULDER COVER
28	4822 432 92704	SUN HOOD
29	4822 432 92707	LENS CAP
30	4822 502 13464	SCREW 2.6 × 4
31	4822 502 13701	SCREW 2.0 × 5
32	4822 502 13706	SCREW 2.6 × 10
33	4822 502 13705	SCREW 2.6 × 14
34	5322 502 13345	SCREW TRIPOD BASE
35	4822 502 12094	SCREW 2.6 × 5
36	5322 502 14083	STAY 1 SCREW
37	4822 410 61017	BUTTON ALC/EDIT/S-VH
38	4822 410 61018	BUTTON AUDIO OUT
39	4822 410 61019	BUTTON HI-FI REC LEV
40	4822 410 61021	BUTTON POWER
41	4822 347 10308	VU METER
42	4822 691 20622	ZOOM SW ASSY
43	4822 321 61016	EVF CONNECTOR
44	4822 242 30225	MICROPHONE
45	4822 691 20621	LENS MODULE
46	4822 361 30323	ZOOM MOTOR GM-16106
47	4822 361 30324	FOCUS MOTOR GM-16105
48	4822 256 91744	SLIDER BASE
49	4822 361 30349	DC BRUSHLESS FAN
50	4822 267 51074	AWB SENSOR UNIT

11-3. CHASSIS ASSEMBLY

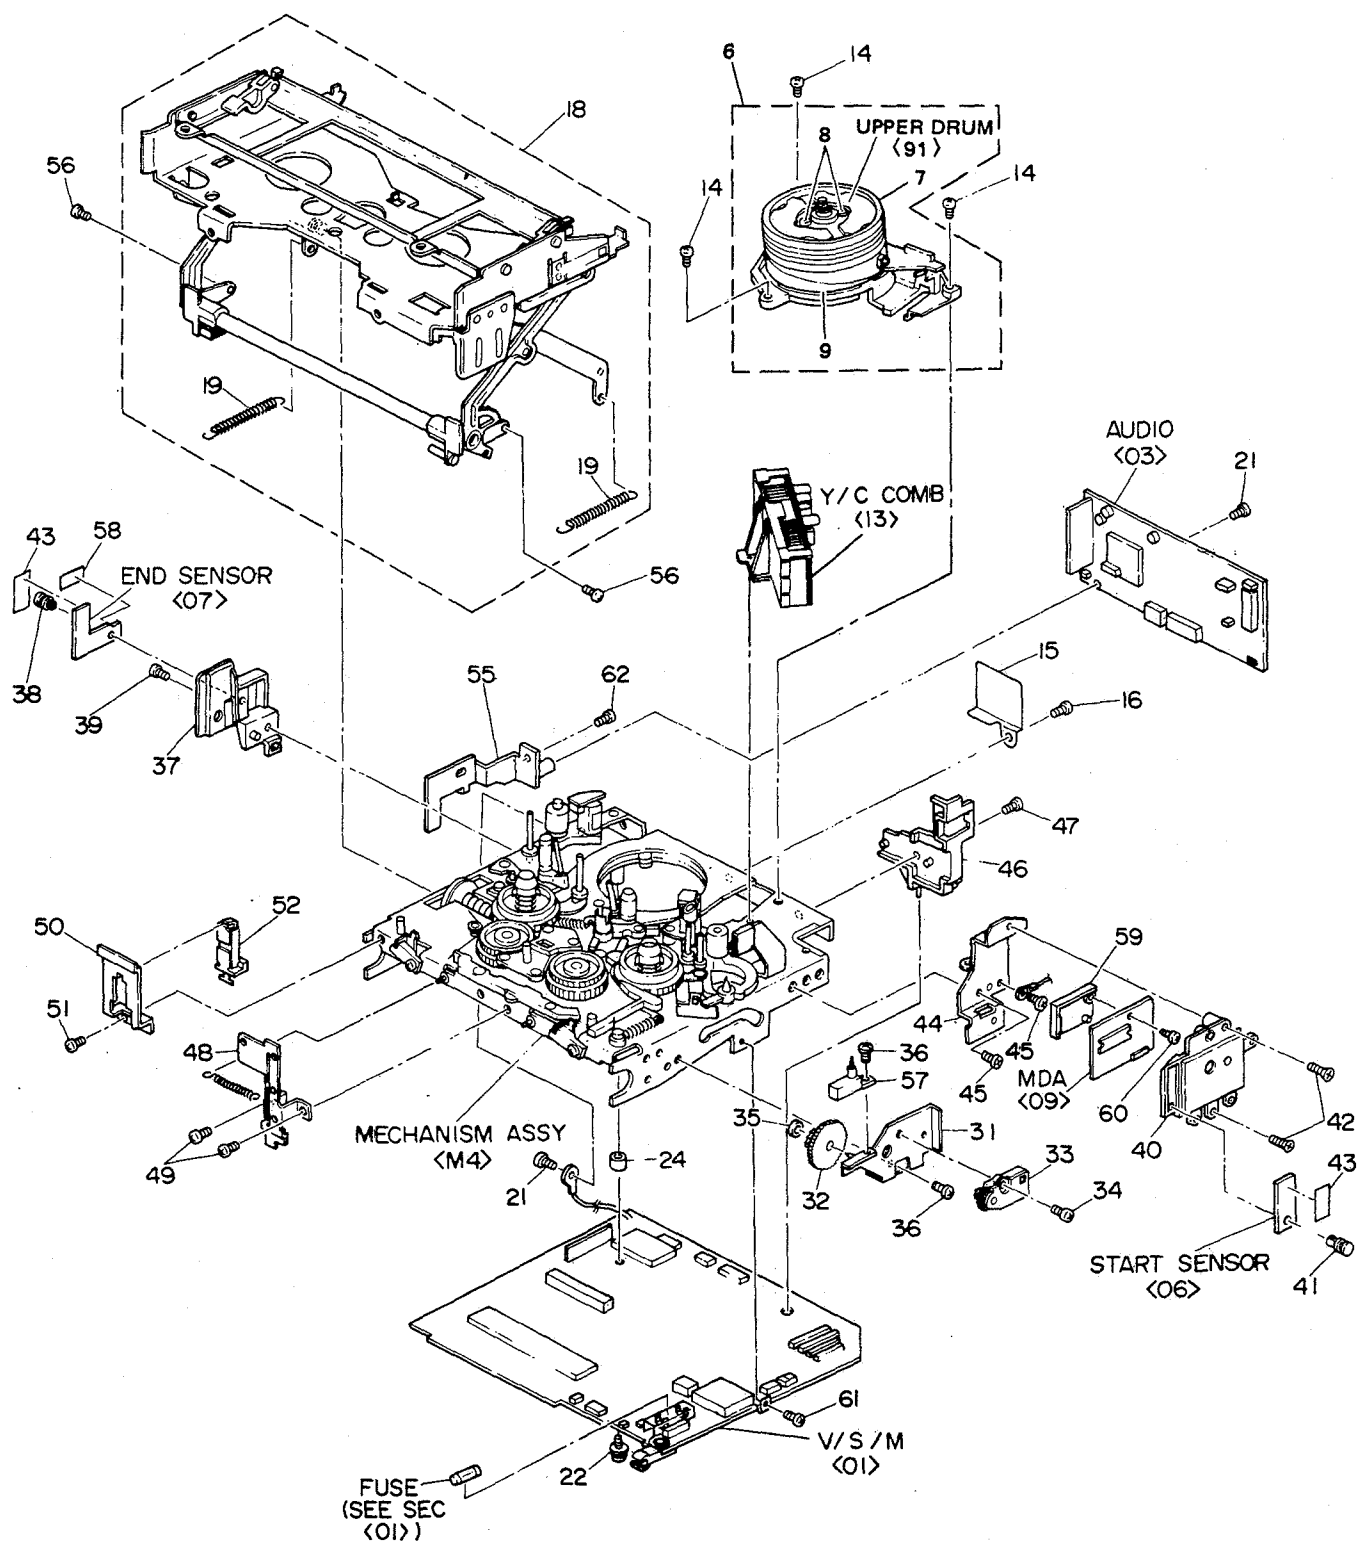

11-4. MECHANISM ASSEMBLY

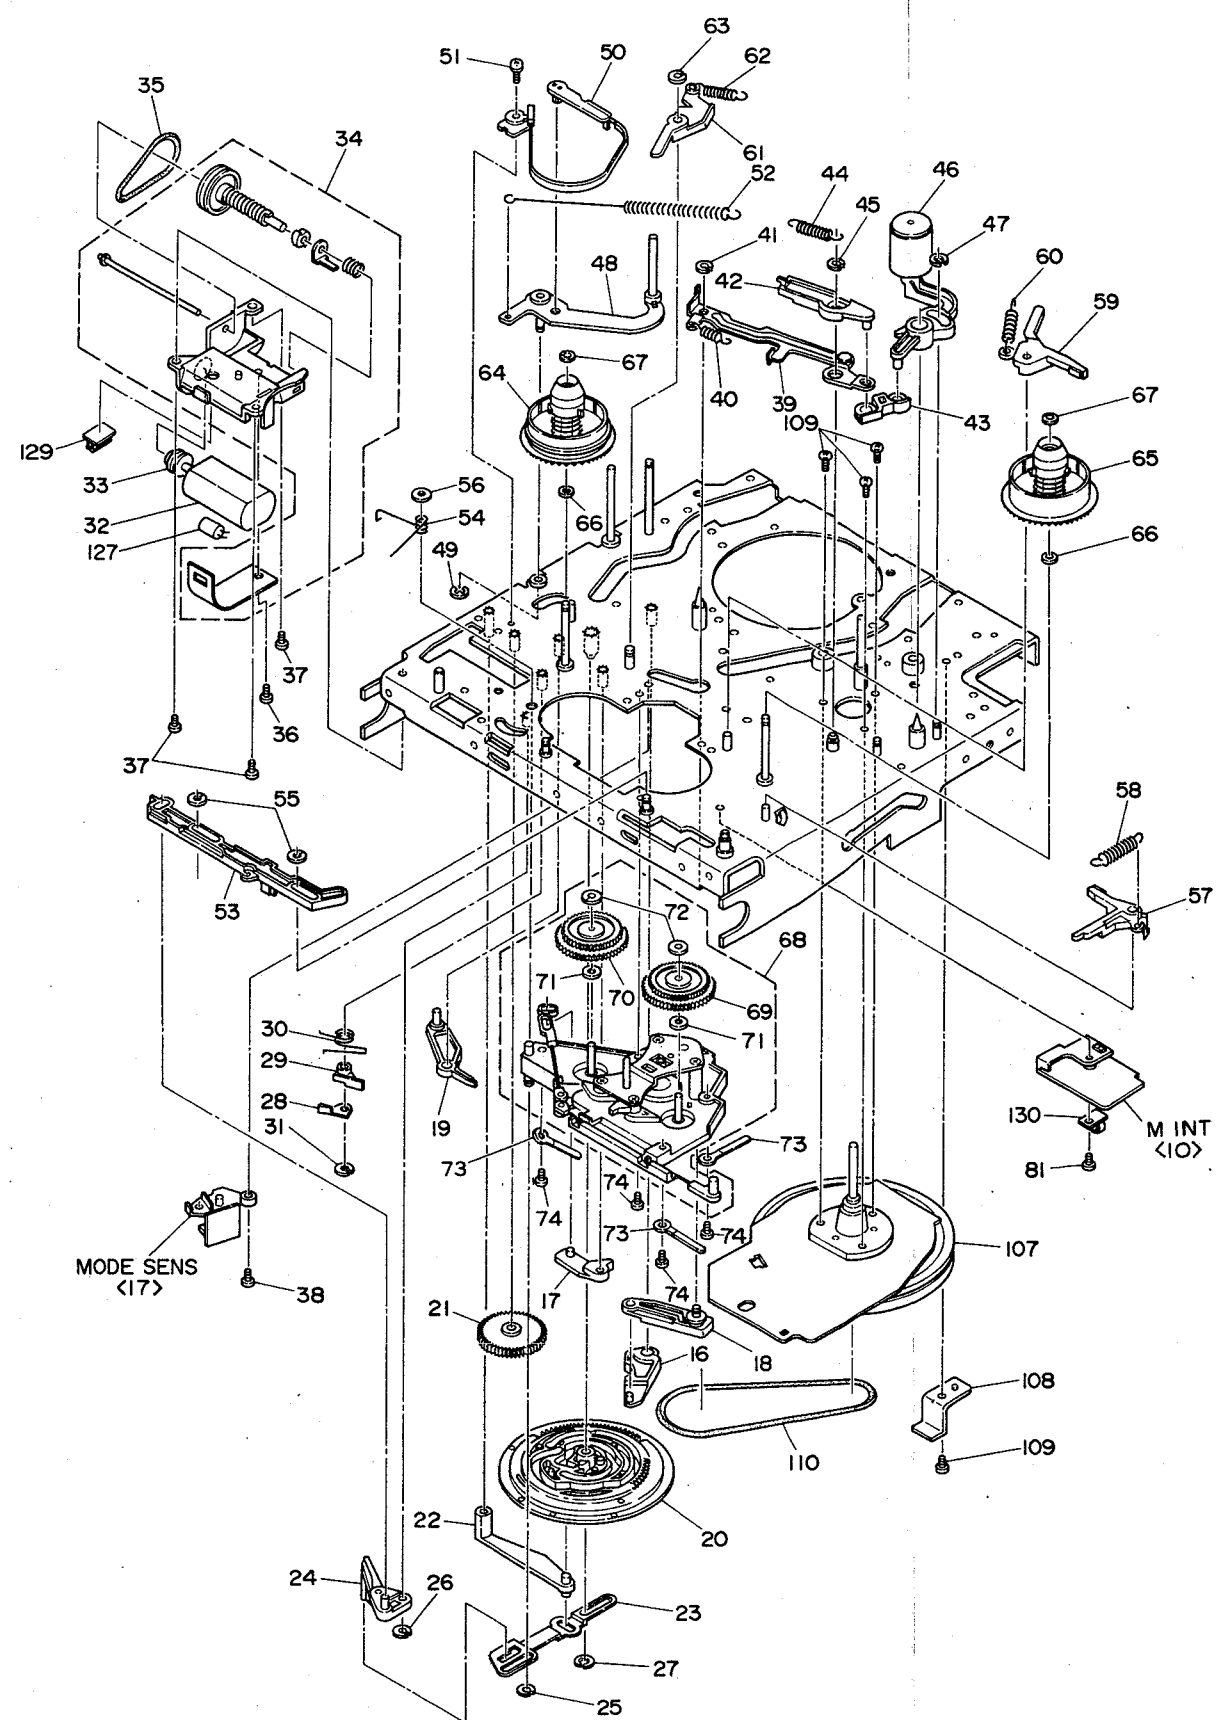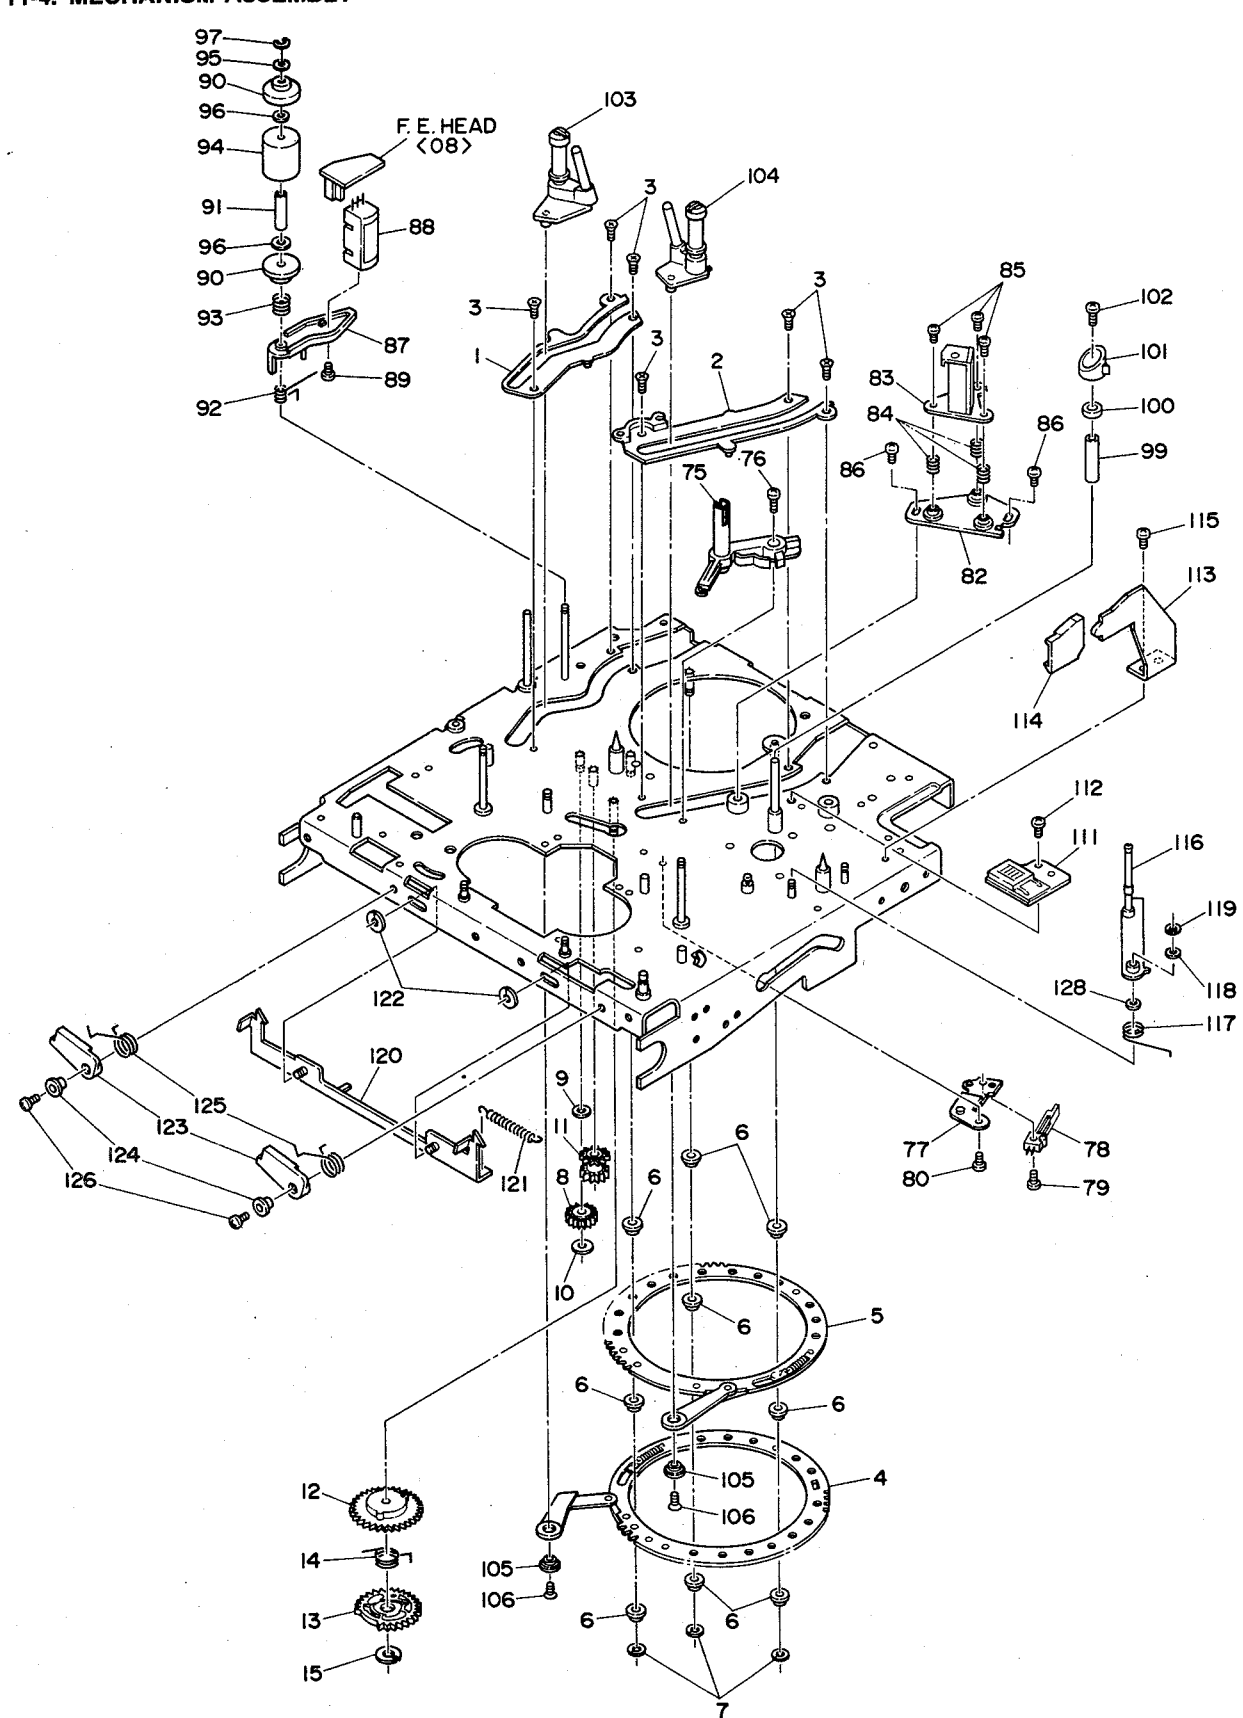


CHASSIS ASSEMBLY

Pos.	Parts code	Description
* 6	4822 691 20504	DRUM ASSY
7	4822 691 20502	UPPER DRUM ASSY
8	4822 502 13283	DRUM SCREW ASSY, X2
9	4822 691 20503	LOWER DRUM MOTOR
14	4822 502 13277	SCREW, X3
15	4822 466 92342	DRUM SHIELD
16	4822 502 13276	SCREW
18	4822 691 20579	CASSETTE HOUSING
21	4822 502 13276	SCREW, X2
22	4822 502 13286	SPECIAL SCREW
24	4822 532 52099	SPACER
31	4822 404 60554	DAMPER BRACKET
32	4822 522 32726	DAMPER GEAR
33	4822 464 50649	DAMPER
34	5322 502 80006	SCREW
35	4822 532 11642	SLIT WASHER
36	4822 502 13276	SCREW, X2
37	4822 404 60531	END.S.BRACKET
38	4822 535 30094	NYLON RIVET
39	4822 502 13276	SCREW
40	4822 459 80642	BASE
41	4822 535 30094	NYLON RIVET
42	4822 502 13285	SCREW, X2
43	4822 466 92341	SHEET, X2
44	4822 404 60532	CAMERA BASE BRACKET
45	4822 502 13276	SCREW, X2
46	4822 404 60553	A.PWB HOLDER
47	4822 502 13276	SCREW
48	4822 404 60533	MAINDECK HOLDER
51	4822 502 13276	SCREW, X2
50	4822 404 60534	REC.SENSOR.HOLDER
51	4822 502 13276	SCREW
52	4822 277 11131	LEAF SWITCH
55	4822 404 60551	AUDIO BOARD BRACKET
56	4822 502 13276	SCREW, X2
57	4822 271 30656	CASSETTE SWITCH
58	4822 466 92343	SHIELD PLATE
59	4822 404 60552	MDA HOLDER
60	4822 502 11716	SCREW
61	4822 502 12826	SCREW
62	4822 502 13276	SCREW

MECHANISM ASSEMBLY

Pos.	Parts code	Description	Pos.	Parts code	Description
1	4822 462 30433	GUIDE RAIL(S)	68	4822 528 20662	CLUTCH MECHA ASSY
2	4822 462 30434	GUIDE RAIL(T)	69	4822 528 20661	TAKE-UP CLUTCH
3	4822 502 13284	SPECIAL SCREW,×6	70	4822 528 20663	SUP CLUTCH
4	4822 522 32724	LOADING RING ASSY(S)	71	4822 532 11789	SPACER,×2
5	4822 522 32725	LOADING RING ASSY(T)	72	4822 532 11783	SLIT WASHER,×2
6	4822 528 70624	GUIDE ROLLER,×9	73	4822 401 11266	WIRE CLAMP,×3
7	4822 532 11778	SLIT WASHER,×3	74	4822 502 13294	SCREW,×4
8	4822 522 32721	CONNECT GEAR(1)	75	4822 404 60564	CASSETTE LED ASSY
9	4822 532 11779	WASHER	76	4822 502 13276	SCREW
10	4822 532 11784	SLIT WASHER	77	4822 404 60558	AL SW BRACKET
11	4822 522 32722	CONNECT GEAR(2)	78	4822 277 11132	LEAF SWITCH
12	4822 522 32719	LOADING GEAR(1)	79	4822 502 13293	SCREW
13	4822 522 32718	LOADING GEAR(2)	80	4822 502 13276	SCREW
14	4822 492 42389	TORSION SPRING	81	4822 502 13288	SCREW
15	4822 532 11777	SLIT WASHER	82	4822 466 82469	HEAD BASE ASSEMBLY
16	4822 404 60548	CAM LEVER(1)	83	4822 249 10378	AUDIO/CONTROL HEAD
17	4822 404 60535	CAM LEVER(2)	84	4822 492 42393	COMPRESSION SPRING
18	4822 404 60549	RELAY ARM ASSEMBLY	85	4822 502 13296	SCREW,×3
19	4822 404 60536	CANCEL LEVER	86	4822 502 13276	SCREW,×2
20	4822 522 32717	CONTROL CAM	87	4822 404 60559	FE HEAD ARM
21	4822 522 32723	WORM WHEEL GEAR	88	4822 249 40221	FULL ERASE HEAD
22	4822 404 60537	CANCEL LEVER(3)	89	4822 502 13292	SCREW
23	4822 404 60538	SLIDE PLATE	90	4822 532 11787	LOWER FLANGE,×2
24	4822 404 60539	RELAY LEVER ASSEMBLY	91	4822 532 21369	COLLAR
25	4822 532 11778	SLIT WASHER	92	4822 492 42395	TORSON SPRING
26	4822 532 11642	SLIT WASHER	93	4822 492 42394	COMPRESSION SPRING
27	4822 532 11559	"E" RING	94	4822 528 70627	IMPEDANCE ROLLER
28	4822 404 60546	CAM BRACKET(1)	95	4822 532 51859	WASHER
29	4822 404 60547	CAM BRACKET(2)	96	4822 532 11792	WASHER,×2
30	4822 492 42391	TORSION SPRING	97	4822 532 11557	"E" RING
31	4822 532 11642	SLIT WASHER	99	4822 528 81334	TAPE GUIDE
32	4822 361 21207	MODE CONTROL MOTOR	100	4822 532 11786	GUIDE FLANGE(T)
33	4822 528 40301	MOTOR PULLEY	101	4822 462 41377	GUIDE POLE CAP
34	4822 691 20519	MOTOR BRACKET UNIT	102	4822 502 13292	SCREW
35	4822 358 30907	BELT	103	4822 404 60574	PO+E BASE ASSEMBLY
36	4822 502 12948	SCREW	104	4822 404 60569	PO+E BASE ASSEMBLY
37	4822 502 13276	SCREW,×3	105	4822 532 11785	SPACER,×2
38	4822 502 11469	SCREW	106	4822 502 13291	SPECIAL SCREW,×2
39	4822 404 60528	PINCH ROLLER PLATE	* 107	4822 361 21208	CAPSTAN MOTOR
40	4822 492 33041	TENSION SPRING	108	4822 404 60563	CAPSTAN MOTOR
41	4822 532 11642	SLIT WASHER			BRACKE
42	4822 404 60541	TOGGLE ARM(1)	109	4822 502 13276	SCREW,×4
43	4822 404 60542	TOGGLE ARM(2)	110	4822 358 30906	BELT
44	4822 492 33046	TENSION SPRING	111	4822 404 60565	DEW SENSOR
45	4822 532 11559	"E" RING			ASSEMBLY
46	4822 403 40496	PINCH ROLLER ARM	112	4822 502 13276	SCREW
47	4822 532 11778	SLIT WASHER	113	4822 404 60562	DOOR GUIDE
48	4822 404 60555	TENSION POLE	114	4822 404 60557	LID GUIDE
49	4822 532 11558	"E" RING	115	4822 502 13276	SCREW
50	4822 321 30365	TENSION BAND	116	4822 404 60573	TU GUIDE ASSEMBLY
51	4822 502 11469	SCREW	117	4822 492 42397	TORSION SPRING
52	4822 492 33045	TENSION SPRING	118	4822 532 51859	WASHER,×1
53	4822 404 60529	CONTROL PLATE	119	4822 532 11561	SLIT WASHER
54	4822 492 42392	TORSION SPRING	120	4822 466 82473	LOCK PLATE ASSEMBLY
55	4822 532 11778	SLIT WASHER,×2	121	4822 492 33051	SPRING
56	4822 532 11642	SLIT WASHER	122	4822 532 11797	SLIT WASHER,×2
57	4822 404 60543	SEARCH BRAKE	123	4822 404 60561	CANCEL LEVER,×2
58	4822 492 33044	TENSION SPRING	124	4822 532 11796	FLANGE COLLAR,×2
59	4822 404 60544	REW BRAKE ASSY	125	4822 492 42396	TORSION SPRING,×2
60	4822 492 33044	TENSION SPRING	126	4822 502 13277	SCREW,×2
61	4822 404 60545	FF BRAKE ASSY	127	4822 124 41728	NP E CAP
62	4822 492 33042	TENSION SPRING	128	4822 532 11793	WASHER
63	4822 532 11784	SLIT WASHER	129	4822 401 11269	WIRE CLAMP
64	4822 528 81331	REEL DISK(S)	130	4822 401 11271	WIRE CLAMP
65	4822 528 81335	REEL DISK(T)			
66	4822 532 11791	WASHER,×2			
67	4822 532 11552	SLIT WASHER,×2			

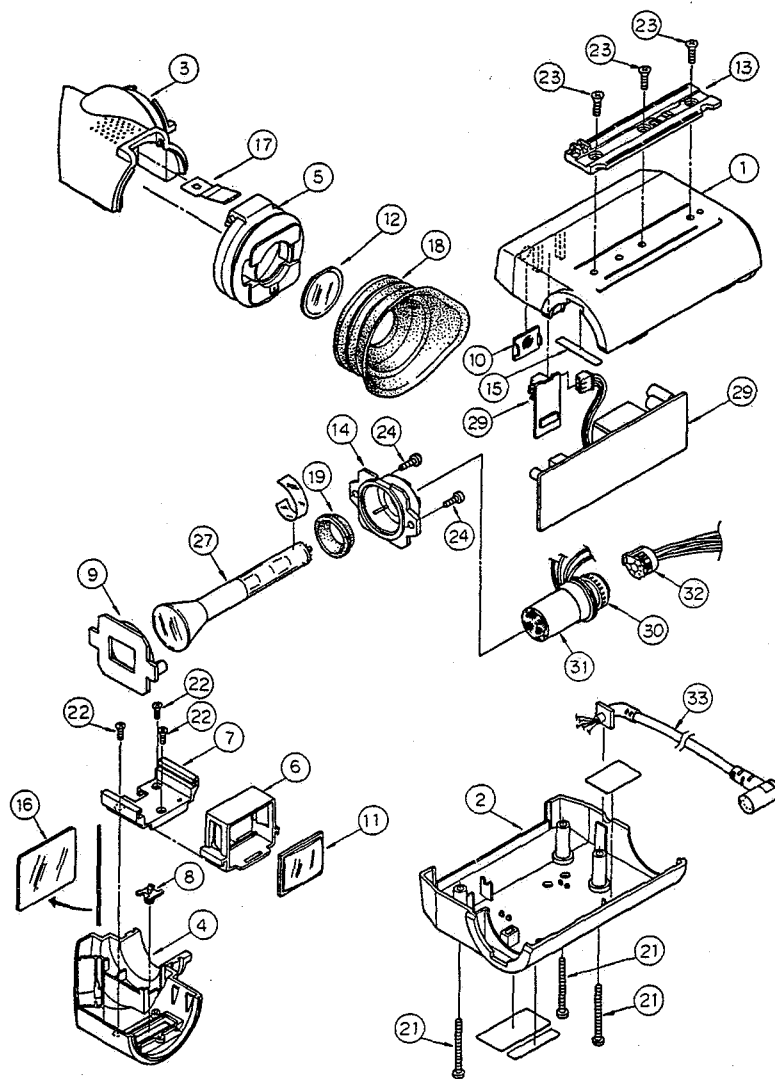

11-5. Electric Viewfinder Assembly

Pos.	Parts code	Description
1	4822 432 60507	TOP CASE
2	4822 432 60508	BOTTOM CASE
3	4822 432 60509	CRT TOP CASE
4	4822 432 60511	CRT BOTTOM CASE
5	4822 256 91739	EYE CAP HOLDER
6	4822 256 91741	LENS HOLDER
7	4822 530 70578	LENS HOLDER GUIDE
8	4822 403 70202	EYESIGHT ADJ. LEVER
9	4822 432 60512	CPT MASK
10	4822 459 20575	LED COVER
11	4822 381 11216	LENS (1)
12	4822 381 11217	LENS (2)
13	4822 530 70579	SHOE
14	4822 256 91742	CRT HOLDER
15	4822 492 70815	FRICTION SPRING
16	4822 380 30282	MIRROR
17	4822 492 70816	EYE CAP SPRING
18	4822 462 71723	EYE CAP
19	4822 532 52296	CRT HOLDER RUBBER
21	4822 502 30291	SCREW
22	4822 502 13703	SCREW
23	4822 502 30531	SCREW
24	4822 502 30417	SCREW
27	4822 131 20397	CRT
30	4822 532 12026	DY FIXING RING
31	4822 150 10301	DEFLECTION YOKE
32	4822 321 61009	CRT CABLE
33	4822 321 61014	VF CABLE

11-6. ELECTRICAL PARTS LIST

Pos.	Parts code	Description	Pos.	Parts code	Description
V/S/M/ P.W.B.					
IC1	4822 209 60327	IC NJM2234M	Q302	4822 130 42344	TR 2SC3480
IC2,3	4822 209 60328	IC NJM2244M	Q303	4822 130 61539	TR 2SC2081(QR)
IC5	4822 209 70888	IC BA7131F	Q304	4822 130 61553	TR DTC124EC
IC6	4822 209 60326	IC NJM2233AM	Q305	4822 130 61539	TR 2SC4081(QR)
IC8	4822 209 60325	IC M52074FP	Q306	4822 130 61553	TR DTC124EU
IC9	4822 209 71686	IC BU4030BF	Q307	4822 130 60856	TR DTC144EU
IC10	4822 209 60343	IC VC2031MP	Q308	4822 130 60854	TR DTA124EU
IC11	4822 209 60316	IC CXL5003M	Q309	4822 130 60856	TR DTC144EU
IC13	4822 209 60375	IC AN78L09	Q310	4822 130 61539	TR 2SC4081(QR)
IC301	4822 209 60319	IC HA118090MA	Q311-13	4822 130 60863	TR 2SA1576(QR)
IC302	4822 209 60321	IC HA118092FP	Q401	4822 130 60862	TR 2SA1576
IC401	4822 209 60312	IC BU2710FA	Q402	4822 130 60669	TR 2SC4081
IC402	4822 209 60329	IC NJM2902E	Q403	4822 130 60862	TR 2SA1576
IC403	4822 209 60315	IC BY7470	Q404	4822 130 60669	TR 2SC4081
IC404	4822 209 62405	IC BAF6305-T2	Q406	4822 130 60854	TR DTA124EU
IC501	4822 209 60798	IC HD63705Z0F-CV16	Q407	4822 130 61553	TR DTC124EU
IC502	4822 209 72403	IC UPD4538BG	Q408	4822 130 60669	TR 2SC4081
IC503	4822 209 71927	IC S-8054HN	Q409	4822 130 60854	TR DTA124EU
IC601	4822 209 83367	IC S-81250HG	Q502	4822 130 60854	TR DTA124EU
IC701	4822 209 60331	IC TA8609P	Q505	4822 130 60856	TR DTC144EU
IC702	4822 209 60332	IC TA8733F	Q506	4822 130 60862	TR 2SA1576
IC703	4822 209 60307	IC AN6392	Q509,10	4822 130 61553	TR DTC124EU
IC901	4822 209 60311	IC BA7007F	Q512-14	4822 130 60856	TR DTC144EU
IC1101	4822 209 62406	IC UPD4011BG	Q515	4822 130 61524	TR DTA144WU
Q1,2	4822 130 60856	TR DTC144EU	Q516	4822 130 61553	TR DTC124EU
Q3	4822 130 61527	TR FMU1	Q601,02	4822 130 61537	TR 2SC2412K(R)
Q8	4822 130 60863	TR 2SA1576(QR)	Q701-04	4822 130 61541	TR 2SC4116(YGL)
Q9	4822 130 60856	TR DTC144EU	Q707	4822 130 60856	TR DTC144EU
Q10,11	4822 130 60863	TR 2SA1576(QR)	Q709	4822 130 61539	TR 2SC4081(QR)
Q12	4822 130 61539	TR 2SC4081(QR)	Q710	4822 130 60863	TR 2SA1576(QR)
Q13	4822 130 60669	TR 2SC4081	Q711	4822 130 61539	TR 2SC4081(QR)
Q15	4822 130 60856	TR DTA144EU	Q715	4822 130 61539	TR 2SC4081(QR)
Q16,17	4822 130 60863	TR 2SA1576(QR)	Q716	4822 130 60863	TR 2SA1576(QR)
Q18-21	4822 130 61539	TR 2SC4081(QR)	Q717	4822 130 61539	TR 2SC4081(QR)
Q22	4822 130 60998	TR 2SA1036K(QR)	Q718	4822 130 60863	TR 2SA1576(QR)
Q23	4822 130 60856	TR DTC144EU	Q719,20	4822 130 61539	TR 2SC4081(QR)
Q24	4822 130 60863	TR 2SA1576(QR)	Q723	4822 130 61541	TR 2SC4116(YGL)
Q25	4822 130 60856	TR DTC144EU	Q728	4822 130 61553	TR DTC124EU
Q26	4822 130 60863	TR 2SA1576(QR)	Q729	4822 130 60856	TR DTC144EU
Q32	4822 130 60856	TR DTC144EU	Q730	4822 130 60998	TR 2SA1036K(QR)
Q34,35	4822 130 60856	TR DTC144EU	Q731	4822 130 60856	TR DTC144EU
Q37	4822 130 60854	TR DTA124EU	Q735,36	4822 130 61541	TR 2SC4116(YGL)
Q38	4822 130 60863	TR 2SA1576(QR)	Q737	4822 130 61554	TR 2SA1586(YG)
Q40-43	4822 130 60856	TR DTC144EU	Q740,41	4822 130 61539	TR 2SC4081(QR)
Q44,45	4822 130 60863	TR 2SA1576(QR)	Q742	4822 130 61553	TR DTC124EU
Q47,48	4822 130 61553	TR DTC124EU	Q743	4822 130 61539	TR 3SC4081(QR)
Q49 48	22 130 60856	TR DTC144EU	Q745-49	4822 130 60856	TR DTC144EU
Q50,51	4822 130 61553	TR DTC124EU	Q750	4822 130 60996	TR DTC144ES
Q52	4822 130 60856	TR DTC144EU	Q901-03	4822 130 61539	TR 2SC4081(QR)
Q53	4822 130 60854	TR DTA124EU	Q1101	4822 130 60735	TR 2SC2412K-X
Q54	4822 130 60856	TR DTC144EU	D1	4822 130 80523	DIODE DA204U
Q55	4822 130 61539	TR 2SC4081(QR)	D2	4822 130 80375	DIODE DAN202U
Q56,57	4822 130 60856	TR DTC144EU	D3	4822 130 80523	DIODE DA204U
Q58	4822 130 60863	TR 2SA1576(QR)	D4,5	4822 130 80375	DIODE DAN202U
Q60,61	4822 130 61539	TR 2SC4081(QR)	D8	4822 130 80375	DIODE DAN202U
Q62-65	4822 130 60856	TR DTC144EU	D12	4822 130 80522	DIODE DAP202U
Q66-68	4822 130 60998	TR 2SA1036K(QR)	D13	4822 130 80375	DIODE DAN202U
Q69,70	4822 130 60854	TR DTA124EU	D14	4822 130 80522	DIODE DAP202U
Q71,72	4822 130 60998	TR 2SA1036K(QR)	D16	4822 130 80375	DIODE DAN202U
Q73	4822 130 60856	TR DTC144EU	D18	4822 130 80522	DIODE DAP202U
Q74	4822 130 61527	TR FMU1	D19	4822 130 80375	DIODE DAN202U
Q76,77	4822 130 60856	TR DTC144EU	D21	4822 130 80375	DIODE DAN202U
Q79,80	4822 130 61539	TR 2SC4081(QR)	D23	4822 130 80375	DIODE DAN202U
Q81	4822 130 61565	TR 2SA933S	D24	4822 130 80522	DIODE DAP202U
Q301	4822 130 60856	TR DTC144EU	D25-31	4822 130 80375	DIODE DAN202U
			D302	4822 130 80375	DIODE DAN202U
			D303	4822 130 80522	DIODE DAP202U

Pos.	Parts code	Description	Pos.	Parts code	Description
D304	4822 130 80375	DIODE DAN202U	R115	4822 116 81482	RES 1K 1/16W
D305	4822 130 80522	DIODE DAP202U	R116	4822 116 81533	RES 820 1/16W
D306,07	4822 130 80375	DIODE DAN202U	R117	4822 116 81525	RES 680 1/16W
D401	4822 130 80523	DIODE DA204U	R118	4822 116 81503	RES 2.7K 1/16W
D404	4822 130 80522	DIODE DAP202U	R119,20	4822 101 10892	V RES 22K
D405	4822 130 80375	DIODE DAN202U	R121,22	4822 101 10886	RES 100K 1/16W
D406	4822 130 32366	Z.DIODE RD5.6EB2	R123,24	4822 111 91738	V RES 33K
D505-07	4822 130 80375	DIODE DAN202U	R125	4822 116 81498	RES 22K 1/16W
D508	4822 130 80522	DIODE DAP202U	R126	4822 116 81533	RES 820 1/16W
D509	4822 130 80375	DIODE DAN202U	R127,28	4822 116 81514	RES 470 1/16W
D511	4822 130 80375	DIODE DAN202U	R129	4822 116 81533	RES 820 1/16W
D512	4822 130 31136	Z.DIODE RD20EB2	R130,31	4822 116 81482	RES 1K 1/16W
D601	4822 130 33944	DIODE DAN202K	R132	4822 116 81519	RES 60 1/16W
D602	4822 130 32778	DIODE 1SS133	R133	4822 116 81507	RES 3.3K 1/16W
D701,02	4822 130 80522	DIODE DAP202U	R134	4822 116 81533	RES 820 1/16W
D703	4822 130 81324	DIODE 1SS302	R135	4822 116 81519	RES 560 1/16W
D704	4822 130 80375	DIODE DAN202U	R136	4822 116 81486	RES 12K 1/16W
D1101	4822 130 33944	DIODE DAN202K-X	R137	4822 116 81526	RES 6.8K 1/16W
D1102	4822 130 33945	DIODE DAP202K-X	R139	4822 116 81483	RES 10K 1/16W
D1103	4822 130 32778	DIODE 1SS133	R141	4822 116 81483	RES 10K 1/16W
R4-6	4822 116 81483	RES 10K 1/16W	R143	4822 101 10851	V RES 10K
R10	4822 116 81544	RES 75 1/6W	R144	4822 101 10889	V RES 15K
R23	4822 116 81497	RES 2.2K 1/16W	R145	4822 116 81521	RES 5.6K 1/16W
R24	4822 116 81544	RES 75 1/6W	R146	4822 116 81511	RES 3.9K 1/16W
R28	4822 116 81504	RES 27K 1/16W	R147	4822 116 81518	RES 680 1/16W
R29	4822 116 81489	RES 15K 1/16W	R151	4822 116 81485	RES 1.2K 1/16W
R30	4822 116 81493	RES 1.8K 1/16W	R152	4822 116 81521	RES 5.6K 1/16W
R31	4822 116 81509	RES 390 1/16W	R153,54	4822 116 81482	RES 1K 1/16W
R32	4822 116 81487	RES 150 1/16W	R155	4822 116 81497	RES 2.2K 1/16W
R33	4822 116 81514	RES 470 1/16W	R156	4822 116 81498	RES 22K 1/16W
R34	4822 116 81549	RES 820 1/10W	R157	4822 116 81483	RES 10K 1/16W
R35	4822 116 81544	RES 75 1/6W	R158	4822 116 81512	RES 39K 1/16W
R36	4822 116 81549	RES 820 1/10W	R159	4822 116 81503	RES 2.7K 1/16W
R37	4822 116 81544	RES 75 1/6W	R160	4822 116 81512	RES 39K 1/16W
R41	4822 116 81498	RES 22K 1/16W	R161	4822 116 81503	RES 2.7K 1/16W
R42	4822 116 81482	RES 1K 1/16W	R162	4822 116 81512	RES 39K 1/16W
R43	4822 116 81506	RES 330 1/16W	R163	4822 116 81503	RES 2.7K 1/16W
R45	4822 116 81503	RES 2.7K 1/16W	R164	4822 116 81512	RES 39K 1/16W
R46	4822 116 81502	RES 270 1/16W	R165	4822 116 81503	RES 2.7K 1/16W
R47	4822 116 81494	RES 18K 1/16W	R166	4822 116 81512	RES 39K 1/16W
R48	4822 116 81515	RES 4.7K 1/16W	R167	4822 116 81503	RES 2.7K 1/16W
R49	4822 116 81525	RES 680 1/16W	R168	4822 116 81482	RES 1K 1/16W
R50,51	4822 116 81521	RES 5.6K 1/16W	R169	4822 116 81533	RES 820 1/16W
R52-54	4822 116 81497	RES 2.2K 1/16W	R170	4822 116 81509	RES 390 1/16W
R55	4822 101 10891	V RES 2.2K	R172	4822 116 81507	RES 3.3K 1/16W
R56	4822 116 81515	RES 4.7K 1/16W	R173	4822 116 81482	RES 1K 1/16W
R57	4822 116 81491	RES 150K 1/16W	R174	4822 116 81514	RES 470 1/16W
R58	4822 116 81505	RES 33 1/16W	R176	4822 116 81517	RES 470K 1/16W
R59,60	4822 116 81482	RES 1K 1/16W	R177	4822 116 81476	RES 1K 1/16W
R61	4822 116 81512	RES 39K 1/16W	R178	4822 116 81535	RES 82K 1/16W
R62	4822 116 81503	RES 2.7K 1/16W	R179	4822 101 10851	V RES 10K
R63	4822 101 10887	V RES 1K	R180	4822 116 81476	RES 1K 1/16W
R64	4822 116 81531	RES 750 1/16W	R181	4822 116 81478	RES 470 1/16W
R65	4822 116 81498	RES 22K 1/16W	R182	4822 116 81477	RES 3.3K 1/16W
R66,67	4822 116 81549	RES 820 1/10W	R183	4822 116 81482	RES 1K 1/16W
R68	4822 116 81482	RES 1K 1/16W	R188	4822 101 10852	V RES 4.7K
R69	4822 116 81487	RES 150 1/16W	R189	4822 116 81547	RES 3.9 1/10W
R71	4822 116 81482	RES 1K 1/16W	R190	4822 116 81492	RES 180 1/16W
R72	4822 116 81542	RES 2.2K 1/6W	R191	4822 111 91737	V RES 220
R99	4822 116 81483	RES 10K 1/16W	R193	4822 116 81509	RES 390 1/16W
R100	4822 116 81519	RES 560 1/16W	R194	4822 116 81482	RES 1K 1/16W
R101	4822 116 81497	RES 2.2K 1/16W	R195	4822 116 81493	RES 1.8K 1/16W
R102	4822 116 81482	RES 1K 1/16W	R196	4822 116 81497	RES 2.2K 1/16W
R103	4822 116 81485	RES 1.2K 1/16W	R197	4822 116 81488	RES 1.5K 1/16W
R106-09	4822 101 10851	V RES 10K	R198	4822 116 81484	RES 1M 1/16W
R111	4822 111 91738	V RES 33K	R199	4822 116 81548	RES 4.7M 1/10W
R112,13	4822 116 81516	RES 47K 1/16W	R200	4822 116 81501	RES 2.4K 1/16W
R114	4822 116 81531	RES 750 1/16W	R201	4822 116 81483	RES 10K 1/16W
			R202	4822 116 81525	RES 680 1/16W

Pos.	Parts code	Description	Pos.	Parts code	Description
R203	4822 116 81511	RES 3.9K 1/16W	R416	4822 116 81483	RES 10K 1/16W
R204	4822 101 10891	V RES 2.2K	R417	4822 116 81507	RES 3.3K 1/16W
R205,06	4822 116 81482	RES 1K 1/16W	R418,19	4822 116 81486	RES 12K 1/16W
R208	4822 116 81483	RES 10K 1/16W	R420-23	4822 101 10886	RES 100K 1/16W
R209	4822 116 81506	RES 330 1/16W	R424	4822 116 81498	RES 22K 1/16W
R210	4822 116 81483	RES 10K 1/16W	R425	4822 101 10813	V RES 22K
R212	4822 116 81498	RES 22K 1/16W	R426	4822 116 81522	RES 56K 1/16W
R214	4822 116 81482	RES 1K 1/16W	R427	4822 100 11202	V RES 470K
R216	4822 116 81508	RES 33K 1/16W	R428	4822 111 91741	V RES 330K
R217	4822 116 81536	RES 1K 1/6W	R429	4822 116 81527	RES 68K 1/16W
R218	4822 116 81539	RES 1.5M 1/16W	R430	4822 116 81483	RES 10K 1/16W
R219	4822 116 81526	RES 6.8K 1/16W	R431	4822 116 81484	RES 1M 1/16W
R220	4822 116 81541	RES 180 1/6W	R432	4822 116 81497	RES 2.2K 1/16W
R222	4822 116 81489	RES 15K 1/16W	R433	4822 116 81525	RES 680 1/16W
R223	4822 116 81477	RES 3.3K 1/16W	R435	4822 116 81483	RES 10K 1/16W
R224	4822 116 81497	RES 2.2K 1/16W	R436	4822 116 81534	RES 8.2K 1/16W
R225	4822 116 81864	RES 1.2M 1/16W	R437	4822 116 81515	RES 4.7K 1/16W
R226	4822 116 81497	RES 2.2K 1/16W	R438	4822 116 81513	RES 390K 1/16W
R300	4822 101 10895	V RES 47K	R439,40	4822 116 81483	RES 10K 1/16W
R301	4822 116 81535	RES 82K 1/16W	R441	4822 116 81515	RES 4.7K 1/16W
R302	4822 116 81492	RES 180 1/16W	R443	4822 116 81538	RES 15K 1/16W
R304	4822 116 81483	RES 10K 1/16W	R444	4822 116 81482	RES 1K 1/16W
R305	4822 116 81507	RES 3.3K 1/16W	R445	4822 116 81484	RES 1M 1/16W
R306	4822 116 81512	RES 39K 1/16W	R446	4822 116 81498	RES 22K 1/16W
R307	4822 116 81497	RES 2.2K 1/16W	R447	4822 116 81482	RES 1K 1/16W
R308	4822 116 81533	RES 820 1/16W	R448	4822 116 81483	RES 10K 1/16W
R309	4822 116 81496	RES 220 1/16W	R501	4822 116 81483	RES 10K 1/16W
R310	4822 116 81506	RES 330 1/16W	R502	4822 101 10886	RES 100K 1/16W
R312	4822 116 81514	RES 470 1/16W	R503	4822 116 81546	RES 220 1/10W
R313	4822 116 81506	RES 330 1/16W	R504-12	4822 116 81482	RES 1K 1/16W
R314	4822 116 81482	RES 1K 1/16W	R513	4822 116 81508	RES 33K 1/16W
R315	4822 116 81509	RES 390 1/16W	R514	4822 116 81489	RES 15K 1/16W
R316	4822 116 81482	RES 1K 1/16W	R515-18	4822 116 81482	RES 1K 1/16W
R317	4822 101 10886	RES 100K 1/16W	R519-26	4822 116 81516	RES 47K 1/16W
R318	4822 116 81514	RES 470 1/16W	R527	4822 116 81483	RES 10K 1/16W
R319	4822 116 81509	RES 390 1/16W	R528	4822 116 81508	RES 33K 1/16W
R320	4822 116 81533	RES 820 1/16W	R529	4822 116 81483	RES 10K 1/16W
R323	4822 116 81494	RES 18K 1/16W	R530	4822 116 81482	RES 1K 1/16W
R324	4822 116 81516	RES 47K 1/16W	R531-33	4822 116 81483	RES 10K 1/16W
R325	4822 116 81499	RES 2.2M 1/16W	R534,35	4822 116 81482	RES 1K 1/16W
R326	4822 116 81519	RES 560 1/16W	R537-39	4822 116 81483	RES 10K 1/16W
R327	4822 116 81514	RES 470 1/16W	R540-48	4822 116 81482	RES 1K 1/16W
R328	4822 116 81482	RES 1K 1/16W	R549,50	4822 116 81495	RES 20K 1/16W
R329	4822 116 81493	RES 1.8K 1/16W	R551	4822 116 81483	RES 10K 1/16W
R330	4822 116 81483	RES 10K 1/16W	R552	4822 116 81495	RES 20K 1/16W
R331,32	4822 116 81482	RES 1K 1/16W	R553	4822 116 81483	RES 10K 1/16W
R335	4822 116 81504	RES 27K 1/16W	R554	4822 116 81495	RES 20K 1/16W
R336	4822 116 81489	RES 15K 1/16W	R555,56	4822 116 81483	RES 10K 1/16W
R337	4822 116 81493	RES 1.8K 1/16W	R557,58	4822 116 81482	RES 1K 1/16W
R338	4822 116 81514	RES 470 1/16W	R559,60	4822 116 81483	RES 10K 1/16W
R339	4822 116 81487	RES 150 1/16W	R562	4822 116 81483	RES 10K 1/16W
R340	4822 116 81496	RES 220 1/16W	R563-70	4822 116 81482	RES 1K 1/16W
R341	4822 116 81482	RES 1K 1/16W	R572	4822 116 81482	RES 1K 1/16W
R342	4822 116 81531	RES 750 1/16W	R576	4822 116 81508	RES 33K 1/16W
R343	4822 116 81488	RES 1.5K 1/16W	R577	4822 116 81515	RES 4.7K 1/16W
R346	4822 116 81498	RES 22K 1/16W	R581	4822 116 81498	RES 22K 1/16W
R347	4822 116 81508	RES 33K 1/16W	R583	4822 116 81498	RES 22K 1/16W
R348	4822 116 81504	RES 27K 1/16W	R584	4822 116 81508	RES 33K 1/16W
R401	4822 116 81517	RES 470K 1/16W	R585	4822 101 10886	RES 100K 1/16W
R402	4822 116 81528	RES 680K 1/16W	R586	4822 116 81508	RES 33K 1/16W
R403	4822 116 81535	RES 82K 1/16W	R587	4822 101 10886	RES 100K 1/16W
R404,05	4822 116 81484	RES 1M 1/16W	R588	4822 116 81508	RES 33K 1/16W
R406	4822 116 81512	RES 39K 1/16W	R590	4822 116 81497	RES 2.2K 1/16W
R407	4822 116 81527	RES 68K 1/16W	R591	4822 116 81508	RES 33K 1/16W
R408	4822 116 81484	RES 1M 1/16W	R592	4822 101 10814	V RES 6.8K
R409	4822 116 81508	RES 33K 1/16W	R593	4822 116 81486	RES 12K 1/16W
R410	4822 116 81528	RES 680K 1/16W	R595,96	4822 116 81507	RES 3.3K 1/16W
R411	4822 116 81516	RES 47K 1/16W	R597	4822 116 81498	RES 22K 1/16W
R415	4822 116 81515	RES 4.7K 1/16W			

Pos.	Parts code	Description	Pos.	Parts code	Description
R601	4822 116 81507	RES 3.3K 1/16W	R785	4822 116 81508	RES 33K 1/16W
R602	4822 116 81508	RES 33K 1/16W	R786	4822 116 81509	RES 390 1/16W
R603	4822 116 81507	RES 3.3K 1/16W	R787	4822 116 81482	RES 1K 1/16W
R604	4822 116 81508	RES 33K 1/16W	R788	4822 101 10887	V RES 1K
R651	4822 116 81483	RES 10K 1/16W	R790	4822 116 81498	RES 22K 1/16W
R652,53	4822 116 81515	RES 4.7K 1/16W	R791	4822 116 81489	RES 15K 1/16W
R654	4822 101 10886	RES 100K 1/16W	R792	4822 116 81525	RES 680 1/16W
R655	4822 116 81508	RES 33K 1/16W	R793	4822 116 81483	RES 10K 1/16W
R661	4822 116 81498	RES 22K 1/16W	R794	4822 116 81498	RES 22K 1/16W
R662	4822 116 81515	RES 4.7K 1/16W	R796	4822 101 10887	V RES 1K
R664	4822 116 81508	RES 33K 1/16W	R797,98	4822 116 81482	RES 1K 1/16W
R665	4822 116 81498	RES 22K 1/16W	R799	4822 116 81525	RES 680 1/16W
R701,02	4822 116 81479	RES 10 1/16W	R800	4822 116 81493	RES 1.8K 1/16W
R703,04	4822 116 81503	RES 2.7K 1/16W	R801	4822 111 91739	V RES 470
R705,06	4822 116 81479	RES 10 1/16W	R803	4822 116 81498	RES 22K 1/16W
R707,08	4822 116 81503	RES 2.7K 1/16W	R804	4822 116 81489	RES 15K 1/16W
R709	4822 116 81483	RES 10K 1/16W	R805	4822 116 81525	RES 680 1/16W
R710	4822 111 91739	V RES 470	R809,10	4822 116 81498	RES 22K 1/16W
R711	4822 116 81483	RES 10K 1/16W	R812,13	4822 116 81483	RES 10K 1/16W
R712,13	4822 111 91739	V RES 470	R814	4822 116 81498	RES 22K 1/16W
R714	4822 116 81483	RES 10K 1/16W	R815	4822 116 81503	RES 2.7K 1/16W
R715	4822 111 91739	V RES 470	R816	4822 116 81487	RES 150 1/16W
R716	4822 116 81483	RES 10K 1/16W	R817	4822 116 81508	RES 33K 1/16W
R717	4822 116 81498	RES 22K 1/16W	R818	4822 116 81482	RES 1K 1/16W
R720	4822 116 81535	RES 82K 1/16W	R819	4822 116 81519	RES 560 1/16W
R721	4822 116 81485	RES 1.2K 1/16W	R820,21	4822 116 81527	RES 68K 1/16W
R722	4822 116 81496	RES 220 1/16W	R822	4822 116 81536	RES 1K 1/16W
R723	4822 116 81482	RES 1K 1/16W	R823	4822 116 81543	RES 820 1/16W
R724	4822 116 81485	RES 1.2K 1/16W	R824,25	4822 116 81483	RES 10K 1/16W
R725	4822 116 81496	RES 220 1/16W	R900	4822 116 81491	RES 150K 1/16W
R726	4822 116 81482	RES 1K 1/16W	R901	4822 116 81497	RES 2.2K 1/16W
R727	4822 116 81483	RES 10K 1/16W	R904	4822 101 10887	V RES 1K
R728	4822 116 81514	RES 470 1/16W	R905	4822 116 81512	RES 39K 1/16W
R729	4822 116 81498	RES 22K 1/16W	R906	4822 116 81487	RES 150 1/16W
R730	4822 116 81504	RES 27K 1/16W	R907	4822 116 81483	RES 10K 1/16W
R731,32	4822 116 81482	RES 1K 1/16W	R910	4822 116 81521	RES 5.6K 1/16W
R734	4822 116 81514	RES 470 1/16W	R911	4822 116 81508	RES 33K 1/16W
R735	4822 101 10891	V RES 2.2K	R912,13	4822 116 81483	RES 10K 1/16W
R737	4822 116 81519	RES 560 1/16W	R914	4822 116 81514	RES 470 1/16W
R738	4822 116 81488	RES 1.5K 1/16W	R915	4822 116 81516	RES 47K 1/16W
R739	4822 116 81519	RES 560 1/16W	R916,17	4822 116 81482	RES 1K 1/16W
R740	4822 116 81515	RES 4.7K 1/16W	R918	4822 116 81503	RES 2.7K 1/16W
R741	4822 116 81525	RES 680 1/16W	R1101	4822 116 81669	RES 33K 1/10W
R742	4822 116 81485	RES 1.2K 1/16W	R1102	4822 116 81647	RES 100K 1/10W
R743,44	4822 116 81482	RES 1K 1/16W	R1103	4822 116 81669	RES 33K 1/10W
R745	4822 116 81507	RES 3.3K 1/16W	C1	4822 124 22925	E CAP 10U 16V
R746,47	4822 116 81482	RES 1K 1/16W	C2-4	4822 122 33984	CAP 0.01U 25V
R748	4822 116 81502	RES 270 1/16W	C5	4822 124 22924	E CAP 47U 6.3V
R749	4822 116 81519	RES 560 1/16W	C6	4822 124 22925	E.CAP 10U 16V
R750	4822 116 81531	RES 750 1/16W	C7	4822 124 22917	E CAP 470U 5V
R751	4822 116 81533	RES 820 1/16W	C8-11	4822 124 22926	E CAP 4.7U 25V
R752,53	4822 116 81482	RES 1K 1/16W	C12	4822 124 22917	E CAP 470U 5V
R754	4822 116 81497	RES 2.2K 1/16W	C13	4822 122 33984	CAP 0.01U 25V
R755	4822 116 81519	RES 560 1/16W	C14	4822 124 22924	E CAP 47U 6.3V
R756	4822 116 81481	RES 100 1/16W	C16	4822 122 33984	CAP 0.01U 25V
R757	4822 101 10894	V RES 3.3K	C21	4822 122 33984	CAP 0.01U 25V
R759	4822 116 81482	RES 1K 1/16W	C22	4822 124 22924	E CAP 47U 6.3V
R760	4822 116 81483	RES 10K 1/16W	C23	4822 122 33984	CAP 0.01U 25V
R761	4822 116 81498	RES 22K 1/16W	C24,25	4822 122 33992	CAP 0.1U 25V
R763	4822 116 81485	RES 1.2K 1/16W	C35-40	4822 122 33984	CAP 0.01U 25V
R769	4822 116 81482	RES 1K 1/16W	C41	4822 124 22924	E CAP 47U 6.3V
R770	4822 116 81523	RES 62K 1/16W	C43	4822 124 22922	E CAP 22U 6.3V
R771	4822 116 81533	RES 820 1/16W	C44	4822 124 22925	E.CAP 10U 16V
R772	4822 116 81524	RES 68 1/16W	C45	4822 122 33985	CAP 10P 50V
R773	4822 116 81532	RES 82 1/16W	C46	4822 122 33994	CAP 470P 50V
R775	4822 116 81497	RES 2.2K 1/16W	C47	4822 124 22923	E CAP 47U 6.3V
R776	4822 116 81515	RES 4.7K 1/16W	C48,49	4822 122 33984	CAP 0.01U 25V
R777	4822 116 81497	RES 2.2K 1/16W	C50	4822 124 22924	E CAP 47U 6.3V
R778	4822 116 81512	RES 39K 1/16W	C51	4822 122 33984	CAP 0.01U 25V

Pos.	Parts code	Description	Pos.	Parts code	Description
C52	4822 124 22918	E CAP 10U 16V	C316	4822 124 22921	E CAP 100U 6.3V
C53,54	4822 124 22927	E CAP 1U 50V	C317	4822 122 33984	CAP 0.01U 25V
C55,56	4822 124 22924	E CAP 47U 6.3V	C318	4822 126 10036	CAP 47P 50V
C73	4822 122 33991	CAP 82P 50V	C319	4822 121 43261	M CAP 0.056U 50V
C75	4822 124 22925	E CAP 10U 16V	C320	4822 121 43257	M CAP 0.1U 50V
C77	4822 124 22927	E CAP 1U 50V	C321	4822 126 10043	CAP 0.015U 50V
C78,79	4822 124 22929	E CAP 0.47U 50V	C322	4822 124 22956	E CAP 0.1U 50V
C81	4822 122 33984	CAP 0.01U 25V	C323	4822 122 33993	CAP 390P 50V
C82	4822 124 22929	E CAP 0.47U 50V	C324	4822 122 33986	CAP 100P 50V
C83,84	4822 124 22925	E CAP 10U 16V	C325	4822 122 33984	CAP 0.01U 25V
C85	4822 124 22921	E CAP 100U 6.3V	C327-29	4822 122 33984	CAP 0.01U 25V
C86	4822 122 33984	CAP 0.01U 25V	C331	4822 122 33984	CAP 0.01U 25V
C87	4822 124 22925	E CAP 10U 16V	C332	4822 126 10026	CAP 22P 50V
C88	4822 124 22915	E CAP 2.2U 25V	C333	4822 126 10019	CAP 0.047U 16V
C89,90	4822 124 22982	E CAP 2.2U 50V	C334	4822 126 10046	CAP 0.0056U 50V
C91	4822 122 33987	CAP 270P 50V	C335,36	4822 122 33984	CAP 0.01U 25V
C92	4822 122 33986	CAP 100P 50V	C337,38	4822 124 22929	E CAP 0.47U 50V
C93	4822 122 33987	CAP 270P 50V	C339	4822 122 33984	CAP 0.01U 25V
C94	4822 122 33988	CAP 39P 50V	C340	4822 124 22926	E CAP 4.7U 25V
C96	4822 122 33993	CAP 390P 50V	C344	4822 121 43258	M CAP 0.022U 50V
C97	4822 122 33989	CAP 47P 50V	C345,46	4822 122 33984	CAP 0.01U 25V
C99	4822 122 33984	CAP 0.01U 25V	C347,48	4822 124 22927	E CAP 1U 50V
C100-02	4822 122 33984	CAP 0.01U 25V	C349,50	4822 122 33984	CAP 0.01U 25V
C103	4822 124 22921	E CAP 100U 6.3V	C351	4822 122 33986	CAP 100P 50V
C104	4822 122 33988	CAP 39P 50V	C352,53	4822 122 33984	CAP 0.01U 25V
C105	4822 122 33985	CAP 10P 50V	C354	4822 124 22924	E CAP 47U 6.3V
C106,07	4822 122 33984	CAP 0.01U 25V	C355,56	4822 124 22956	E CAP 0.1U 50V
C108	4822 124 22928	E CAP 0.22U 50V	C357	4822 122 33991	CAP 82P 50V
C109	4822 122 33993	CAP 390P 50V	C358	4822 122 33984	CAP 0.01U 25V
C110-12	4822 122 33984	CAP 0.01U 25V	C359	4822 126 10033	CAP 56P 50V
C113	4822 122 33987	CAP 270P 50V	C360	4822 122 33988	CAP 39P 50V
C114	4822 122 33991	CAP 82P 50V	C361	4822 122 33984	CAP 0.01U 25V
C116	4822 126 10049	CAP 270P 50V	C364	4822 126 10035	CAP 4P
C117	4822 124 22926	E CAP 4.7U 25V	C401,02	4822 124 22958	E CAP 2.2U 50V
C120-22	4822 124 22926	E CAP 4.7U 25V	C403,04	4822 124 22945	E CAP 10U 16V
C123	4822 124 22925	E CAP 10U 16V	C405	4822 121 43263	M CAP 0.1U
C124	4822 122 33984	CAP 0.01U 25V	C406	4822 124 22937	NP E CAP 4.7U 25V
C125	4822 124 22924	E CAP 47U 6.3V	C407	4822 126 10018	CAP 0.0033U 50V
C126	4822 122 33984	CAP 0.01U 25V	C408	4822 124 22939	NP E CAP 0.47U 50V
C128	4822 126 10049	CAP 270P	C409	4822 121 43259	M CAP 0.039U 50V
C129	4822 126 10051	CAP 82P	C410	4822 121 43262	M CAP 0.082U 50V
C132	4822 122 33984	CAP 0.01U 25V	C411,12	4822 126 10015	CAP 0.001U 50V
C133	4822 124 22929	E CAP 0.47U 50V	C413	4822 124 22941	E CAP 100U 6.3V
C134	4822 122 33984	CAP 0.01U 25V	C414,15	4822 126 10015	CAP 0.001U 50V
C138	4822 124 22924	E CAP 47U 6.3V	C416	4822 121 42511	M CAP 0.01U 50V
C139,40	4822 122 33984	CAP 0.01U 25V	C417	4822 126 10018	CAP 0.0033U 50V
C141	4822 124 22947	E CAP 33U 16V	C418,19	4822 126 10028	CAP 27P 50V
C142	4822 124 22925	E CAP 10U 16V	C420	4822 124 22941	E CAP 100U 6.3V
C144	4822 124 22947	E CAP 33U 16V	C421	4822 124 22948	E CAP 47U 16V
C146	4822 122 33984	CAP 0.01U 25V	C422	4822 124 22946	E CAP 22U 16V
C147	4822 124 22956	E CAP 0.1U 50V	C423	4822 124 22945	E CAP 10U 16V
C148	4822 124 22924	E CAP 47U 6.3V	C426	4822 124 22957	E CAP 1U 50V
C149	4822 124 22926	E CAP 4.7U 25V	C427	4822 124 11078	CAP 22U 4V
C150	4822 122 33988	CAP 39P 50V	C428	4822 126 10027	CAP 220P 50V
C151	4822 126 10032	CAP 47P 50V	C429	4822 122 33984	CAP 0.01U 25V
C152	4822 124 22957	E CAP 1U 50V	C430	4822 124 11079	CAP 1U 10V
C301,02	4822 122 33984	CAP 0.01U 25V	C501,02	4822 126 10029	CAP 33P 50V
C303	4822 124 22921	E CAP 100U 6.3V	C503	4822 124 22955	E CAP 4.7U 25V
C304	4822 122 33984	CAP 0.01U 25V	C504	4822 122 33992	CAP 0.1U 25V
C305	4822 126 10041	CAP 0.01U 25V	C505,06	4822 121 42511	M CAP 0.01U 50V
C306	4822 122 33992	CAP 0.1U 25V	C507,08	4822 122 33986	CAP 100P 50V
C307,08	4822 124 22929	E CAP 0.47U 50V	C509	4822 126 10045	CAP 0.0047U 50V
C309	4822 122 33984	CAP 0.01U 25V	C511	4822 122 33992	CAP 0.1U 25V
C310	4822 124 22953	E CAP 3.3U 25V	C601	4822 124 22954	E CAP 33U 25V
C311	4822 122 33992	CAP 0.1U 25V	C602	4822 124 22936	E CAP 100U 6.3V
C312	4822 124 22921	E CAP 100U 6.3V	C603	4822 124 22954	E CAP 33U 25V
C313	4822 126 10037	CAP 0.068U 25V	C604	4822 124 22943	E CAP 47U 10V
C314	4822 126 10027	CAP 220P 50V	C605	4822 126 10044	CAP 0.023U 50V
C315	4822 122 33984	CAP 0.01U 25V	C606	4822 124 22951	E CAP 10U 25V

Pos.	Parts code	Description	Pos.	Parts code	Description
C607	4822 124 22941	E CAP 100U 6.3V	C908	4822 126 10034	CAP 68P 50V
C609,10	4822 124 22959	E CAP 100U 25V	C909,10	4822 122 33984	CAP 0.01U 25V
C701-08	4822 122 33984	CAP 0.01U 25V	C1001	4822 124 10827	T CAP 4.7U 25V
C709-12	4822 125 50407	TRIMMER CAP-20P	C1101	4822 126 10077	CAP 0.0033U 50V
C713,14	4822 122 33984	CAP 0.01U 25V	C1102	4822 126 10131	CAP 0.01U 50V
C715-17	4822 124 22927	E CAP 1U 50V	L1-5	4822 157 53366	COIL 47U
C718	4822 122 33984	CAP 0.01U 25V	L12	4822 157 53366	COIL 47U
C719	4822 124 22927	E CAP 1U 50V	L15,16	4822 157 53366	COIL 47U
C720	4822 124 22924	E CAP 47U 6.3V	L18,19	4822 157 53366	COIL 47U
C721,22	4822 122 33984	CAP 0.01U 25V	L21	4822 157 53212	COIL 18U
C723	4822 126 10039	CAP 0.01U 16V	L301,02	4822 157 53366	COIL 47U
C724	4822 124 22924	E CAP 47U 6.3V	L303	4822 157 60056	COIL 8.2m
C725	4822 122 33984	CAP 0.01U 25V	L304	4822 157 60057	COIL 15U
C726,27	4822 126 10022	CAP 120P 50V	L306	4822 157 60054	COIL 820U
C728	4822 126 10047	CAP 330P 50V	L307	4822 157 60055	COIL 2.2m
C729	4822 122 33984	CAP 0.01U 25V	L308	4822 157 60053	COIL 470U
C730	4822 126 10033	CAP 56P 50V	L309,10	4822 157 53366	COIL 47U
C731	4822 126 10024	CAP 150P 50V	L601	4822 152 20671	COIL 47U
C732	4822 122 33987	CAP 270P 50V	L701,02	4822 157 53366	COIL 47U
C733,34	4822 122 33984	CAP 0.01U 25V	L703	4822 157 60061	COIL 180U
C735	4822 126 10034	CAP 68P 50V	L704	4822 157 90146	COIL 33U
C736	4822 126 10031	CAP 36P 50V	L705	4822 157 60065	COIL 82U
C738	4822 122 33988	CAP 39P 50V	L706	4822 157 60058	COIL 100U
C739	4822 124 22924	E CAP 47U 6.3V	L707	4822 157 90146	COIL 33U
C740	4822 122 33984	CAP 0.01U 25V	L708	4822 157 90148	COIL 56U
C741	4822 126 10025	CAP 18P 50V	L709	4822 157 90147	COIL 39U
C742	4822 122 33988	CAP 39P 50V	L710	4822 157 60062	COIL 220U
C743	4822 122 33985	CAP 10P 50V	L711	4822 157 90139	COIL 10U
C744	4822 126 10021	CAP 12P 50V	L712	4822 157 90143	COIL 22U
C747	4822 126 10033	CAP 56P 50V	L713	4822 157 53366	COIL 47U
C748	4822 126 10023	CAP 15P 50V	L714	4822 157 60063	COIL 47U
C749	4822 126 10028	CAP 27P 50V	L716	4822 157 90148	COIL 56U
C750,51	4822 126 10021	CAP 12P 50V	L717	4822 157 90143	COIL 22U
C752	4822 122 33984	CAP 0.01U 25V	L719	4822 157 53366	COIL 47U
C753	4822 122 33989	CAP 47P 50V	L720	4822 157 60064	COIL 5.6U
C754,55	4822 122 33984	CAP 0.01U 25V	L722	4822 157 90149	COIL 68U
C756,57	4822 124 22927	E CAP 1U 50V	L723	4822 157 53366	COIL 47U
C759	4822 122 33984	CAP 0.01U 25V	L724	4822 157 60062	COIL 220U
C760	4822 126 10042	CAP 0.027U 25V	L725	4822 157 60059	COIL 15U
C761	4822 122 33984	CAP 0.01U 25V	L726	4822 157 53366	COIL 47U
C762	4822 124 22949	E CAP 47U 16V	L727	4822 157 60066	COIL 220U
C763	4822 122 33984	CAP 0.01U 25V	L901	4822 157 60054	COIL 820U
C764	4822 124 22927	E CAP 1U 50V	L902	4822 157 53366	COIL 47U
C765	4822 122 33989	CAP 47P 50V	L903	4822 157 60067	TRAP
C766,67	4822 122 33984	CAP 0.01U 25V	EQ1	4822 218 20861	EQUALIZER
C770	4822 122 33984	CAP 0.01U 25V	EQ2	4822 218 20864	EQUALIZER
C774	4822 122 33984	CAP 0.01U 25V	LPF2	4822 157 60068	LOW PASS FILTER
C775	4822 124 22924	E CAP 47U 6.3V	LPF3	4822 157 53976	LOW PASS FILTER
C776-78	4822 122 33984	CAP 0.01U 25V	LPF4	4822 157 53977	LOW PASS FILTER
C779,80	4822 126 10022	CAP 120P 50V	LPF301	4822 157 53982	LOW PASS FILTER
C781	4822 122 33984	CAP 0.01U 25V	BPF301	4822 157 53967	BAND PASS FILTER
C782	4822 126 10033	CAP 56P 50V	BPF302	4822 157 53968	BAND PASS FILTER
C784,85	4822 122 33984	CAP 0.01U 25V	BPF901	4822 157 53971	BAND PASS FILTER
C787,88	4822 122 33984	CAP 0.01U 25V	VF301	4822 242 72448	CERAMIC FILTER
C789	4822 122 33992	CAP 0.1U 25V	CF501	4822 242 71893	RESONATOR
C791	4822 122 33984	CAP 0.01U 25V	DL301	4822 320 40195	2H DELAY LINE
C792,93	4822 124 22938	NP E CAP 4.7U 25V	* X301	4822 242 72447	X-TAL RESONATOR
C794	4822 124 22956	CAP 0.1U 50V	* X401	4822 242 71896	X-TAL RESONATOR
C795	4822 122 33984	CAP 0.01U 25V	DD1	4822 273 10178	SW. REGULATOR
C796	4822 122 33992	CAP 0.1U 25V	TH2	4822 116 40158	THERMISTOR
C797	4822 122 33984	CAP 0.01U 25V	RY601	4822 280 50073	RELAY
C798	4822 126 10016	CAP 0.0012U 50V	* CP601	4822 252 51076	CIRCUIT PRO. F25
C799	4822 126 10038	CAP 180P 50V	* CP602	4822 252 20284	CIRCUIT PRO. F38
C901	4822 124 22944	E CAP 47U 10V	* F1	4822 253 30027	FUSE 3.15A 250V
C902	4822 124 22942	E CAP 33U 10V	Audio P.W.B.		
C903	4822 124 22925	E CAP 10U 16V	IC1	4822 209 60304	IC AN3994NS
C904,05	4822 122 33984	CAP 0.01U 25V	IC2	4822 209 60348	IC 10VT30
C906	4822 126 10017	CAP 0.0018U 50V			
C907	4822 126 10054	CAP 0.0027U 25V			

Pos.	Parts code	Description	Pos.	Parts code	Description
IC3	4822 209 60303	IC AN3926S	R43	4822 116 81646	RES 10K 1/10W
IC4	4822 209 60306	IC AN6299NC	R44	4822 116 81651	RES 12K 1/10W
IC5	4822 209 60342	IC VC2024A	R45	4822 116 81677	RES 5.6K 1/10W
IC7	4822 209 60318	IC HA11752MP	R46,47	4822 116 81645	RES 1K 1/10W
IC8	4822 209 60351	IC 5VT16	R48	4822 116 81663	RES 2.2M 1/10W
* Q1	4822 130 61544	TR 2SD1450S,T	R49	4822 116 81655	RES 150K 1/10W
Q2	4822 130 60861	TR FMW3	R50	4822 116 81667	RES 330 1/10W
Q3,4	4822 130 60729	TR DTC124EK	R51	4822 116 81645	RES 1K 1/10W
Q5	4822 130 60861	TR FMW3	R52,53	4822 116 81668	RES 3.3K 1/10W
Q6	4822 130 60146	TR DTC144EK	R54	4822 116 81651	RES 12K 1/10W
Q7	4822 130 60729	TR DTC124EK	R55	4822 116 81655	RES 150K 1/10W
* Q8	4822 130 61543	TR 2SD1330S,T	R56	4822 116 81677	RES 5.6K 1/10W
Q9,10	4822 130 60729	TR DTC124EK	R57,58	4822 116 81646	RES 10K 1/10W
Q12	4822 111 90812	TR DTA124EK	R59	4822 116 81661	RES 22K 1/10W
Q13,14	4822 130 60729	TR DTC124EK	R60	4822 116 81656	RES 180 1/10W
Q15	4822 130 61544	TR 2SD1450S,T	R61	4822 101 30621	V RES 3.3K
Q16	4822 130 60729	TR DTC124EK	R62	4822 116 81656	RES 180 1/10W
Q17	4822 130 60335	TR 2SA1037K	R63	4822 101 30621	V RES 3.3K
Q18	4822 130 61533	TR 2SB643Q	R64	4822 116 81656	RES 180 1/10W
Q19	4822 130 61546	TR 2SD638Q	R65	4822 116 81675	RES 47K 1/10W
Q20	4822 130 61542	TR 2SD1328S,T	R66	4822 116 81661	RES 22K 1/10W
Q21	4822 130 61531	TR 2SA1037K(S)	R67	4822 116 81663	RES 2.2M 1/10W
Q22,23	4822 130 60729	TR DTC124EK	R68	4822 116 81669	RES 33K 1/10W
Q24,25	4822 130 60341	TR 2SC2412K	R69	4822 116 81657	RES 1.8K 1/10W
Q26	4822 130 60335	TR 2SA1037K	R70	4822 116 81671	RES 3.9K 1/10W
Q27	4822 130 60729	TR DTC124EK	R71	4822 116 81681	RES 6.8K 1/10W
Q29	4822 130 60861	TR FMW3	R72	4822 116 81549	RES 820 1/10W
Q30-32	4822 130 60858	TR FMG1	R73	4822 116 81651	RES 12K 1/10W
Q33	4822 130 60857	TR FMC2	R74	4822 116 81671	RES 3.9K 1/10W
Q34	4822 111 90812	TR DTA124EK	R75	4822 116 81654	RES 15K 1/10W
Q35-37	4822 130 60729	TR DTC124EK	R76-78	4822 116 81675	RES 47K 1/10W
Q38	4822 130 60857	TR FMC2	R79	4822 116 81654	RES 15K 1/10W
D1	4822 130 81321	Z.DIODE RD11M	R80	4822 116 81671	RES 3.9K 1/10W
D2	4822 130 32778	DIODE 1SS133	R81	4822 116 81651	RES 12K 1/10W
D3	4822 130 81317	Z.DIODE MR15	R82	4822 116 81549	RES 820 1/10W
D4	4822 130 81321	Z.DIODE RD11M	R83	4822 116 81681	RES 6.8K 1/10W
D7	4822 130 32778	DIODE 1SS133	R84	4822 116 81671	RES 3.9K 1/10W
D8	4822 130 81319	Z.DIODE RD11M	R85	4822 116 81657	RES 1.8K 1/10W
R1	4822 116 81646	RES 10K 1/10W	R86	4822 116 81663	RES 2.2M 1/10W
R2	4822 116 81669	RES 33K 1/10W	R87	4822 116 81669	RES 33K 1/10W
R3	4822 116 81645	RES 1K 1/10W	R89	4822 116 81671	RES 3.9K 1/10W
R4	4822 116 81644	RES 100 1/10W	R90	4822 116 81678	RES 56K 1/10W
R6	4822 116 81666	RES 27K 1/10W	R91	4822 116 81661	RES 22K 1/10W
R7	4822 101 30622	V RES 33K	R92	4822 116 81675	RES 47K 1/10W
R8-10	4822 116 81645	RES 1K 1/10W	R93,94	4822 116 81651	RES 12K 1/10W
R11	4822 116 81673	RES 4.3K 1/10W	R95	4822 116 81648	RES 1M 1/10W
R13	4822 116 81652	RES 120K 1/10W	R97-99	4822 116 81646	RES 10K 1/10W
R14	4822 116 81649	RES 120 1/10W	R100	4822 116 81665	RES 2.7K 1/10W
R15	4822 101 10778	V RES 330	R101	4822 116 81677	RES 5.6K 1/10W
R16	4822 116 81672	RES 39K 1/10W	R102	4822 116 81665	RES 2.7K 1/10W
R17	4822 116 81643	RES 10 1/10W	R103	4822 116 81677	RES 5.6K 1/10W
R18	4822 116 81669	RES 33K 1/10W	R104	4822 116 81546	RES 220 1/10W
R19	4822 116 81646	RES 10K 1/10W	R105	4822 116 81648	RES 1M 1/10W
R20	4822 116 81661	RES 22K 1/10W	R106,07	4822 101 10777	V RES 2.2K
R21	4822 116 81672	RES 39K 1/10W	R108	4822 116 81665	RES 2.7K 1/10W
R22	4822 116 81661	RES 22K 1/10W	R110-12	4822 116 81645	RES 1K 1/10W
R23,24	4822 116 81646	RES 10K 1/10W	R113	4822 116 81677	RES 5.6K 1/10W
R25	4822 116 81671	RES 3.9K 1/10W	R114	4822 116 81659	RES 2.2K 1/10W
R26-28	4822 116 81645	RES 1K 1/10W	R115,16	4822 116 81645	RES 1K 1/10W
R29	4822 116 81679	RES 680 1/10W	R117	4822 101 30619	V RES 22K
R30	4822 116 81669	RES 33K 1/10W	R118	4822 116 81646	RES 10K 1/10W
R31,32	4822 116 81668	RES 3.3K 1/10W	R119	4822 116 81647	RES 100K 1/10W
R33	4822 116 81679	RES 680 1/10W	R120	4822 116 81645	RES 1K 1/10W
R34	4822 116 81669	RES 33K 1/10W	R121	4822 116 81647	RES 100K 1/10W
R35,36	4822 116 81645	RES 1K 1/10W	R122	4822 116 81653	RES 1.5K 1/10W
R37	4822 116 81675	RES 47K 1/10W	R123	4822 116 81658	RES 22 1/10W
R38,39	4822 116 81645	RES 1K 1/10W	R124	4822 116 81668	RES 3.3K 1/10W
R40,41	4822 116 81661	RES 22K 1/10W	R125	4822 116 81674	RES 4.7K 1/10W
R42	4822 116 81645	RES 1K 1/10W	R126	4822 116 81668	RES 3.3K 1/10W
			R127	4822 116 81653	RES 1.5K 1/10W

Pos.	Parts code	Description	Pos.	Parts code	Description
R128	4822 116 81658	RES 22 1/10W	C56	4822 126 10072	CAP 0.01U 50V
R129	4822 116 81645	RES 1K 1/10W	C57	4822 126 10058	CAP 150P 50V
R130	4822 116 81664	RES 270 1/10W	C58	4822 124 22942	E CAP 33U 10V
R131	4822 116 81665	RES 2.7K 1/10W	C59	4822 124 22922	E CAP 22U 6.3V
R132,33	4822 116 81677	RES 5.6K 1/10W	C60	4822 126 10075	CAP 0.015U 50V
R134-37	4822 116 81645	RES 1K 1/10W	C61	4822 124 22982	E CAP 2.2U 50V
R138	4822 116 81676	RES 560 1/10W	C62,63	4822 124 22942	E CAP 33U 10V
R139	4822 116 81665	RES 2.7K 1/10W	C64	4822 126 10075	CAP 0.015U 50V
R140	4822 116 81676	RES 560 1/10W	C65	4822 124 22949	E CAP 47U 16V
R141,42	4822 116 81674	RES 4.7K 1/10W	C66	4822 124 22942	E CAP 33U 10V
R143	4822 116 81661	RES 2.2K 1/10W	C67	4822 126 10075	CAP 0.015U 50V
R144	4822 116 81676	RES 560 1/10W	C68	4822 124 22942	E CAP 33U 10V
R145	4822 116 81677	RES 5.6K 1/10W	C69	4822 124 22958	E CAP 2.2U 50V
R147	4822 116 81662	RES 220K 1/10W	C70	4822 126 10075	CAP 0.015U 50V
R148	4822 116 81549	RES 820 1/10W	C71	4822 124 22922	E CAP 22U 6.3V
R149	4822 116 81679	RES 680 1/10W	C72	4822 124 22942	E CAP 33U 10V
R150,51	4822 116 81661	RES 22K 1/10W	C73	4822 126 10058	CAP 150P 50V
R152,53	4822 116 81679	RES 680 1/10W	C74	4822 124 22925	E CAP 10U 16V
R154,55	4822 116 81671	RES 3.9K 1/10W	C75	4822 126 10072	CAP 0.01U 50V
R156,57	4822 116 81643	RES 10 1/10W	C76	4822 126 10065	CAP 820P 50V
R159	4822 116 81742	RES 8.2K 1/10W	C77	4822 124 22922	E CAP 22U 6.3V
R161	4822 116 81666	RES 27K 1/10W	C78	4822 124 22981	E CAP 33U 6.3V
R162-64	4822 116 81661	RES 22K 1/10W	C79	4822 124 22925	E CAP 10U 16V
R167	4822 116 81645	RES 1K 1/10W	C80	4822 122 90043	CAP 0.022U 25V
C1	4822 124 22924	E CAP 47U 6.3V	C81	4822 124 22925	E CAP 10U 16V
C3	4822 124 22981	E CAP 33U 6.3V	C82	4822 124 22982	E CAP 2.2U 50V
C4	4822 124 22922	E CAP 22U 6.3V	C83	4822 126 10056	CAP 100P 50V
C5	4822 124 22982	E CAP 2.2U 50V	C84	4822 124 22949	E CAP 47U 16V
C6	4822 122 90043	CAP 0.022U 25V	C85,86	4822 126 10071	CAP 0.001U 50V
C8	4822 124 22927	E CAP 1U 50V	C87,88	4822 124 22979	E CAP 220U 4V
C9	4822 124 22949	E CAP 47U 16V	C89	4822 124 22921	E CAP 100U 6.3V
C10	4822 121 43272	PP CAP 0.022U	C90	4822 126 10072	CAP 0.01U 50V
C11	4822 124 22925	E CAP 10U 16V	C91,92	4822 124 22925	E CAP 10U 16V
C12	4822 121 43274	M CAP 470P 50V	C93	4822 124 22921	E CAP 100U 6.3V
C13	4822 124 22949	E CAP 47U 16V	C94	4822 124 22925	E CAP 10U 16V
C14	4822 124 22927	E CAP 1U 50V	C95	4822 126 10076	CAP 0.0022U 50V
C15	4822 124 22984	E CAP 4.7U 35V	C96	4822 124 22925	E CAP 10U 16V
C17	4822 121 43258	M CAP 0.022U 50V	C97	4822 126 10076	CAP 0.0022U 50V
C18	4822 124 22925	E CAP 10U 16V	C98	4822 122 90043	CAP 0.022U 25V
C19	4822 124 22929	E CAP 0.47U 50V	C99	4822 126 10056	CAP 100P 50V
C20	4822 126 10064	CAP 680P 50V	C100	4822 122 90043	CAP 0.022U 25V
C22	4822 126 10057	CAP 0.0012U 50V	C101	4822 126 10071	CAP 0.001U 50V
C23	4822 122 90043	CAP 0.022U 25V	C102	4822 126 10076	CAP 0.0022U 50V
C24	4822 126 10066	CAP 0.018U 25V	C103,04	4822 126 10072	CAP 0.01U 50V
C26	4822 124 22925	E CAP 10U 16V	C105	4822 126 10071	CAP 0.001U 50V
C27	4822 124 22922	E CAP 22U 6.3V	C106	4822 126 10073	CAP 0.0012U 50V
C28,29	4822 124 22982	E CAP 2.2U 50V	C107-09	4822 126 10072	CAP 0.01U 50V
C30	4822 124 22922	E CAP 22U 6.3V	C110	4822 124 22949	E CAP 47U 16V
C31	4822 124 22983	E CAP 3.3U 50V	C111	4822 126 10072	CAP 0.01U 50V
C32	4822 126 10077	CAP 0.0033U 50V	C112,13	4822 126 10071	CAP 0.001U 50V
C33	4822 124 22983	E CAP 3.3U 50V	C114	4822 126 10069	CAP 22P 50V
C34	4822 126 10077	CAP 0.0033U 50V	C116	4822 126 10072	CAP 0.01U 50V
C35	4822 124 22925	E CAP 10U 16V	C117,18	4822 124 22921	E CAP 100U 6.3V
C36	4822 126 10072	CAP 0.01U 50V	C119	4822 126 10072	CAP 0.01U 50V
C37,38	4822 124 22949	E CAP 47U 16V	C120	4822 124 22928	E CAP 0.22U 50V
C39	4822 124 22922	E CAP 22U 6.3V	C121	4822 126 10061	CAP 330P 50V
C40	4822 124 22925	E CAP 10U 16V	C122	4822 126 10062	CAP 39P 50V
C41	4822 126 10057	CAP 0.0012U 50V	C123	4822 126 10071	CAP 0.001U 50V
C42	4822 126 10066	CAP 0.018U 25V	C124	4822 126 10072	CAP 0.01U 50V
C43-46	4822 124 22925	E CAP 10U 16V	C125	4822 124 22921	E CAP 100U 6.3V
C47	4822 124 22982	E CAP 2.2U 50V	C126,27	4822 126 10059	CAP 220P 50V
C48	4822 124 22921	E CAP 100U 6.3V	C128,29	4822 126 10063	CAP 560P 50V
C49	4822 124 22978	NP E CAP 2.2U 35V	C130-33	4822 126 10072	CAP 0.01U 50V
C50	4822 124 22977	NP E CAP 2.2U 35V	C134,35	4822 126 10074	CAP 0.0015U 50V
C51	4822 124 22925	E CAP 10U 16V	C138	4822 126 10038	CAP 180P 50V
C52	4822 124 22922	E CAP 22U 6.3V	C139	4822 124 22956	E CAP 0.1U 50V
C53	4822 124 22981	E CAP 33U 6.3V	L1	4822 157 60095	COIL 5.6m
C54	4822 124 22925	E CAP 10U 16V	L2	4822 157 60085	PEAKING COIL 220U
C55	4822 126 10065	CAP 820P 50V	L3	4822 157 60086	OSC COIL
			L4,5	4822 157 60088	PEAKING COIL 1.5m

Pos.	Parts code	Description	Pos.	Parts code	Description
L6,7	4822 157 60089	COIL 1.8m	C2	4822 121 43277	SMF CAP 0.01U 50V
L8,9	4822 157 60084	PEAKING COIL 100U	C3	4822 121 43278	SMF CAP 0.022U 50V
L10	4822 157 60085	PEAKING COIL 220U	C4	4822 124 10828	T CAP 2.2U 25V
L11	4822 157 60084	PEAKING COIL 100U	C5	4822 124 22948	E CAP 47U 16V
L12	4822 157 60091	PEAKING COIL 1.2U	PHS1	4822 130 61521	PHOTO SENSOR
L13	4822 157 60084	PEAKING COIL 100U	* TH1	4822 111 91712	POS.THERMISTOR
L14	4822 157 60085	PEAKING COIL 220U	HD1	4822 404 60583	TU SENSOR HOLDER
L15	4822 157 60084	PEAKING COIL 100U	Y/C Comb P.W.B.		
L16	4822 157 60087	S.TRANS	IC1	4822 209 60345	IC VC2063FS
L17	4822 157 60084	PEAKING COIL 100U	Q1	4822 130 60863	TR 2SA1576(QR)
BPF1	4822 157 53965	BAND PASS FILTER	Q2	4822 130 61539	TR 2SC4081(QR)
BPF2	4822 157 53966	BAND PASS FILTER	Q3	4822 130 60863	TR 2SA1576(QR)
Start sensor P.W.B.			Q4	4822 130 61539	TR 2SC4081(QR)
PT1	4822 130 60333	PHOTO TR TPS605	R1-4	4822 116 81509	RES 390 1/16W
C1	4822 126 10104	CAP 0.01U 16V	R5	4822 101 10895	V RES 47K
End sensor P.W.B.			R6	4822 116 81498	RES 22K 1/16W
PT1	4822 130 60333	PHOTO TR TPS605	R7	4822 101 10895	V RES 47K
C1	4822 126 10104	CAP 0.01U 16V	R8	4822 116 81498	RES 22K 1/16W
Full erase head P.W.B.			R9	4822 116 81482	RES 1K 1/16W
IC1	4822 209 60349	IC 3VT03	R11	4822 111 91739	V RES 470
C1	4822 124 22945	E CAP 10U 16V	R12	4822 116 81509	RES 390 1/16W
C2	4822 121 43276	M CAP 0.033U 50V	R13,14	4822 116 81498	RES 22K 1/16W
Motor drive amp. P.W.B.			R15-17	4822 116 81482	RES 1K 1/16W
IC1	4822 209 60308	IC AN6671K	R18	4822 116 81533	RES 820 1/16W
Q1	5322 130 41905	TR 2SA1020	R19-21	4822 116 81482	RES 1K 1/16W
D1	4822 130 80762	DIODE 11DQ04	R22	4822 101 10852	V RES 4.7K
R1	4822 116 81638	RES 33K 1/6W	R23	4822 116 81498	RES 22K 1/16W
R2	4822 116 81641	RES 4.7K 1/6W	R24	4822 101 10892	V RES 22K
R3	4822 116 81536	RES 1K 1/6W	R25	4822 116 81503	RES 2.7K 1/16W
R4	4822 116 81637	RES 22K 1/6W	R26	4822 116 81511	RES 3.9K 1/16W
R5	4822 116 81695	RES 560 1/6W	R27	4822 116 81497	RES 2.2K 1/16W
R6,7	4822 116 81536	RES 1K 1/6W	R28	4822 116 81485	RES 1.2K 1/16W
R8	4822 116 81694	RES 47K 1/6W	R29,30	4822 116 81516	RES 47K 1/16W
R9	4822 116 81727	RES 3.3K 1/6W	R31,32	4822 116 81519	RES 560 1/16W
R10,11	4822 116 81637	RES 22K 1/6W	R33	4822 111 91739	V RES 470
R12	4822 116 81636	RES 10K 1/6W	R34	4822 116 81492	RES 180 1/16W
R13,14	4822 116 81693	RES 3.9K 1/6W	C1	4822 122 33984	CAP 0.01U 25V
* R15	4822 116 90255	POS.THERMISTOR	C2	4822 126 10105	CAP 0.1U 50V
RA1	4822 111 91745	RES ARRAY	C3	4822 124 10831	T CAP 47U 6.3V
C1	4822 124 22989	E CAP 33U 25V	C4	4822 122 33984	CAP 0.01U 25V
C2	4822 124 22988	E CAP 10U 25V	C5	4822 122 33986	CAP 100P 50V
C3	4822 124 22995	E CAP 100U 25V	C6	4822 122 33984	CAP 0.01U 25V
C4-7	4822 124 22958	E CAP 2.2U 50V	C7	4822 122 33986	CAP 100P 50V
C8	4822 121 43276	M CAP 0.033U 50V	C8	4822 122 33984	CAP 0.01U 25V
C9	4822 121 43258	M CAP 0.022U 50V	C9	4822 124 10834	T CAP 10U 16V
C10	4822 124 22945	E CAP 10U 16V	C11,12	4822 122 33984	CAP 0.01U 25V
L1	4822 157 60094	COIL 12U	C14-16	4822 122 33984	CAP 0.01U 25V
L2	4822 157 60098	COIL 100U	C17	4822 122 33986	CAP 100P 50V
Mechacon interface P.W.B.			C18	4822 122 33989	CAP 47P 50V
IC1	4822 209 60314	IC BX7469	C19	4822 122 33984	CAP 0.01U 25V
IC2	4822 209 60309	IC BA6209U2	C20	4822 126 10039	CAP 0.01U 16V
Q1	4822 130 61536	TR 2SC1545A,B	L1	4822 157 60096	COIL 8.2U
Q2	4822 130 61525	TR DTC124EF	L2	4822 157 60099	COIL 2H DL
D1	4822 130 32366	Z.DIODE RD5.6EB2	L3	4822 157 60096	COIL 8.2U
D2	4822 130 81322	Z.DIODE RD8.2EB2	L4	4822 157 60099	COIL 4H DL
R1	4822 116 81703	RES 1K 1/6W	L5	4822 157 53366	COIL 47U
R2	4822 116 81708	RES 470 1/6W	EQ1	4822 218 20862	EQUALIZER
R3	4822 116 81706	RES 180 1/6W	EQ2	4822 218 20863	EQUALIZER
R4	4822 116 81704	RES 1K 1/6W	BPF1	4822 157 53969	BAND PASS FILTER
C1	4822 124 41728	NP E CAP 1U 50V	BPF2	4822 157 53972	BAND PASS FILTER
			DL1	4822 320 40196	DELAY LINE
			TH1	4822 116 30354	THERMISTOR
			TH2	4822 116 30353	THERMISTOR
			Mode sensor P.W.B.		
			D1,2	4822 130 81316	DIODE GL430

Pos.	Parts code	Description	Pos.	Parts code	Description
R1	4822 116 81542	RES 2.2K 1/6W	C758	4822 124 11074	TAN CAP 10U 16V
BKT1	4822 404 60582	MODE SENSOR BRAKET	C762	4822 121 43828	CAP 0.022U
Camera Control P.W.B.			C766	4822 124 11074	TAN CAP 10U 16V
S101-07	4822 276 12899	SW PUSH	C768	4822 124 11127	TAN CAP 0.33U 50V
S108	4822 276 13023	SW PUSH	C771	4822 124 41842	TAN CAP 47U 16V
S109-12	4822 276 12899	SW PUSH	C773	4822 124 41842	TAN CAP 47U 16V
S113,14	4822 276 13022	SW PUSH	C781	4822 124 11074	TAN CAP 10U 16V
S116	4822 277 21467	SW SLIDE	C784,85	4822 124 11074	TAN CAP 10U 16V
S117,18	4822 276 12899	SW PUSH	V701	4822 125 60163	V CAP 47PF
S119,20	4822 277 21467	SW SLIDE	D701	4822 130 81672	DIODE 02CZ6.2Z
S121	4822 276 12899	SW PUSH	D703,04	4822 130 80523	DIODE DA204K
Eject/Power P.W.B.			D706	4822 130 80522	DIODE DAP202K
S201	4822 276 13019	SW PUSH	D707	4822 130 33944	DIODE DAN202K
S202	4822 276 13024	SW PUSH	D708	4822 130 82384	DIODE DAN212K
Headphone P.W.B.			D709,10	4822 130 33944	DIODE DAN202K
J301	4822 267 20412	JACK STEREO	D712-24	4822 130 80523	DIODE DA204K
J302,03	4822 267 20413	JACK MONO	D725	4822 130 82382	DIODE MA704
T301,02	4822 130 62523	TR DTC124EL	D726	4822 130 82383	DIODE MA707
Trigger p.w.b.			D728	4822 130 80523	DIODE DA204K
S401	4822 276 13018	SW PUSH	D729	4822 130 82384	DIODE DAN212K
Operation P.W.B.			D730	4822 130 82383	DIODE MA707
C509	4822 124 23537	E CAP 0.02F 5.5V	D731	4822 130 80522	DIODE DAP202K
D501-04	4822 130 82381	DIODE RB100A	D732	4822 130 82385	DIODE 02CZ7.5Z
D505,06	4822 130 82071	DIODE SLR-34MG	D733	4822 130 80523	DIODE DA204K
D507,08	4822 130 33305	DIODE 1SS133	D734-36	4822 130 80523	DIODE DA204K
H501	4822 130 90932	LCD S-8063V	D737,38	4822 130 33944	DIODE DAN202K
I501	4822 209 63382	IC 74HC4066AP	D739,40	4822 130 82384	DIODE DAN212K
P501	4822 100 11714	VR 20KA X 2	D741	4822 130 80523	DIODE DA204K
P502	4822 100 11713	VR 33KB	D742	4822 130 80522	DIODE DAP202K
P504	4822 100 11713	VR 33KB	D743	4822 130 82384	DIODE DAN212K
P510	4822 100 11653	VR 10KB	I701	4822 209 63372	IC 82C55
P516	4822 100 11653	VR 10KB	I702	4822 209 63376	IC UPD6145
P560	4822 101 30737	VR 400K	I703	4822 209 62331	IC MB654225PD-G
S501-11	4822 276 13021	SW PUSH	I704	4822 209 63386	IC 80C52
S512-14	4822 277 21469	SW SLIDE	I705	5322 209 62343	IC PCF8583T
S515	4822 276 13025	SW SLIDE	I706	4822 209 63374	IC NJM311M
T501	4822 130 62523	TR DTC124EL	I707	4822 209 62503	IC 74HC4053
T502	4822 130 62525	TR 2SC4010	I708	4822 209 63373	IC MB654220PD-G
T503	4822 130 62523	TR DTC124EL	I709	4822 209 61494	IC 74HC74
T504	4822 130 62525	TR 2SC4010	I710	4822 209 60784	IC LM1881
T505	4822 130 62524	TR DTC144EL	I711	4822 209 63384	IC 74HC221
T506	4822 130 62521	TR DTA144EL	I712	4822 209 80655	IC NJM78M08A
T507,08	4822 130 62524	TR DTC144EL	I720	4822 209 61534	IC 74HCU04
Battery P.W.B.			I722	4822 209 61493	IC 74HC14
D601-03	4822 130 31018	DIODE 1S1555	I723	4822 209 63383	IC 74HC4066AF
S601-03	4822 276 13021	SW PUSH	I724	4822 209 62329	IC PST520C
S604	4822 277 21468	SW SLIDE	I725	4822 209 63383	IC 74HC4066AF
New Indicator P.W.B.			I726	4822 209 61534	IC 74HCU04
C704	4822 124 11125	TAN CAP 1U 50V	I728	4822 209 63381	IC 74HC4046
C705-07	4822 124 11074	TAN CAP 10U 16V	I730	4822 209 63379	IC 74HC08
C708	4822 124 41842	TAN CAP 47U 16V	I732,33	4822 209 63385	IC NJM78L05UA
C709	4822 124 11074	TAN CAP 10U 16V	L701	4822 157 53876	COIL 33UH
C710	4822 121 43826	CAP 0.1U 50V	T701-04	4822 130 43398	TR 2SC2712GR
C712	4822 124 10773	TAN CAP 4.7U 25V	T705	4822 209 63377	TR XN1501
C717	4822 121 43829	CAP 0.033U	T707,08	4822 130 90449	TR DTC144EK
C721	4822 124 11074	TAN CAP 10U 16V	T709	4822 209 63377	TR XN1501
C725	4822 124 11124	TAN CAP 0.1U 50V	T710	4822 130 43398	TR 2SC2712GR
C751	4822 124 41842	TAN CAP 47U 16V	T711	4822 130 90449	TR DTC144EK
			T712	4822 130 43398	TR 2SC2712GR
			T713	4822 130 61427	TR 2SK621
			T714	4822 130 62522	TR UN2217
			T715	4822 130 90449	TR DTC144EK
			T717	4822 130 43398	TR 2SC2712GR
			T718,19	4822 130 42733	TR 2SA1162GR
			T720	4822 130 43398	TR 2SC2712GR
			T721	4822 130 90449	TR DTC144EK
			T722	4822 130 61354	TR 2SA1213
			T723	4822 130 43398	TR 2SC2712GR

Pos.	Parts code	Description	Pos.	Parts code	Description
T724	4822 130 42733	TR 2SA1162GR	2500,01	4822 126 11221	CAP 10UF 16V
X701	4822 242 73875	X-TAL 32.768KHZ	2503	4822 126 11221	CAP 10UF 16V
X702	4822 242 73574	X-TAL 7.25MHZ	2505	4822 126 11216	CAP 22UF 6.3V
X703	4822 242 73874	X-TAL 24MHZ	2506	4822 126 11221	CAP 10UF 16V
Microphone P.W.B.			2507	4822 122 33806	CAP 820PF 63V
C801	4822 122 32672	TAN CAP 1U 16V	2508	4822 126 10004	CAP 120PF 63V
C802	4822 121 43827	CAP 0.0012U	2509	4822 126 11221	CAP 10UF 16V
C803	4822 122 32672	TAN CAP 1U 16V	2521	4822 122 33805	CAP 330PF 63V
C804	4822 121 43827	CAP 0.0012U	2522	4822 126 10002	CAP 100NF 25V
C805	4822 124 11131	TAN CAP 47U 6.3V	2530	4822 126 10002	CAP 100NF 25V
C806,07	4822 124 11124	TAN CAP 0.1U 50V	2531	5322 122 32452	CAP 47PF 50V
C808	4822 124 11131	TAN CAP 47U 6.3V	2532	5322 122 32661	CAP 56PF 50V
C809	4822 124 11076	TAN CAP 3.3U 50V	2535-41	4822 126 10002	CAP 100NF 25V
C810	4822 124 11074	TAN CAP 10U 16V	2542	5322 122 34098	CAP 10NF 63V
C811	4822 124 11075	TAN CAP 22U 16V	2545	4822 126 10002	CAP 100NF 25V
C812	4822 124 11128	TAN CAP 33U 16V	2546	5322 122 34123	CAP 1NF 50V
C813,14	4822 124 11126	TAN CAP 10U 10V	2553	4822 126 10002	CAP 100NF 25V
C815,16	4822 124 11129	TAN CAP 4.7U 10V	2557	4822 126 10002	CAP 100NF 25V
D801,02	4822 130 82384	DIODE DAN212K	2558	5322 126 10463	CAP 2.2UF 6.3V
I801	4822 209 62335	IC NJU7201U50	2559	4822 122 33891	CAP 3.3NF 63V
I802	4822 209 63369	IC 10VT28	2560	4822 122 32916	CAP 220NF 63V
I803	4822 209 63371	IC 9VT08	2561	4822 126 10002	CAP 100NF 25V
I804	4822 209 63383	IC 74HC4066AF	2562	4822 126 11232	CAP 180NF
J801	4822 267 31276	JACK MIC	2563	4822 122 32183	CAP 56NF 50V
P807	4822 100 11654	VR 100KB	2564	4822 122 31759	CAP 18NF
A/V Connector P.W.B.			2565	4822 126 10525	CAP 8.2NF 63V
C901	4822 124 23536	E CAP 470U 4V	2567	4822 126 10002	CAP 100NF 25V
C904	4822 124 11186	TAN CAP 4.7U 16V	2569	4822 126 10002	CAP 100NF 25V
C905	4822 124 11074	TAN CAP 10U 16V	2570	4822 126 11232	CAP 180NF
C907	4822 124 23536	E CAP 470U 4V	2575	4822 126 10002	CAP 100NF 25V
C910	4822 124 11186	TAN CAP 4.7U 16V	2578-80	4822 126 10002	CAP 100NF 25V
D901	4822 130 81672	DIODE 02CZ6.2Z	2581	5322 122 32531	CAP 100PF 50V
I901,02	4822 209 63375	IC NJM2266M	2583-85	4822 126 10002	CAP 100NF 25V
J901	4822 267 31278	A/V S OUTPUT JACK	2587	4822 126 10002	CAP 100NF 25V
J903	4822 267 31277	A/V S INPUT JACK	2590	5322 122 34098	CAP 10NF 63V
L901	4822 157 53876	COIL 330UH	2591	4822 126 10002	CAP 100NF 25V
T901	4822 130 43398	TR 2SC2712GR	2596	5322 122 34123	CAP 1NF 50V
T902	4822 209 63378	TR XN2501	2603	4822 126 10002	CAP 100NF 25V
T903	4822 130 43398	TR 2SC2712GR	2609	4822 122 33891	CAP 3.3NF 63V
T904	4822 209 63378	TR XN2501	2610	4822 122 32916	CAP 220NF 63V
Fan control P.W.B.			2611	4822 126 10002	CAP 100NF 25V
C001,02	4822 126 11449	C CAP 0.1U 50V	2612	4822 122 32183	CAP 56NF 50V
C003	4822 124 23421	E CAP 10U 16V	2613	4822 122 31759	CAP 18NF
C004	4822 126 11449	C CAP 0.1U 50V	2614	4822 126 10525	CAP 8.2NF 63V
C005	4822 124 23668	E CAP 56U 16V	2615	4822 126 11219	CAP 1UF 16V
D001	4822 130 82384	DIODE DAN212K	2617,18	4822 126 10002	CAP 100NF 25V
D002	4822 130 80523	DIODE DA204K	2620,21	4822 126 11219	CAP 1UF 16V
D003	4822 130 82384	DIODE DAN212K	2622-24	4822 126 11221	CAP 10UF 16V
T001-04	4822 130 60146	TR DTC144EK	2625	4822 126 10002	CAP 100NF 25V
T005	4822 130 61354	TR 2SA1213	2630	4822 126 10002	CAP 100NF 25V
I001	4822 209 63806	IC BA10393F	2633	4822 126 10002	CAP 100NF 25V
I002	4822 209 63385	IC NJM78L05UA	2634,35	4822 126 11221	CAP 10UF 16V
* TH01	4822 111 91997	THERMISTOR 1.5K	2636	4822 126 10002	CAP 100NF 25V
Chroma delay P.W.B.			2640,41	4822 126 10002	CAP 100NF 25V
F001	4822 156 21643	LOW PASS FILTER	2644	4822 126 10002	CAP 100NF 25V
I001	4822 209 62502	IC JNM2406F	2645	4822 126 11221	CAP 10UF 16V
T001	4822 130 61796	TR 2SC2712GR	2649	4822 126 10002	CAP 100NF 25V
AF-ECS P.W.B.			2653	4822 126 10002	CAP 100NF 25V
1655	4822 242 73885	X-TAL 12MHZ	2655,56	5322 122 32658	CAP 22PF 50V
			2657-59	4822 126 10002	CAP 100NF 25V
			2660,61	5322 122 34098	CAP 10NF 63V
			2662,63	4822 126 10002	CAP 100NF 25V
			2665	4822 126 10002	CAP 100NF 25V
			2667,68	4822 126 10525	CAP 8.2NF 63V
			2676	4822 122 33128	CAP 15NF 63V
			2680	5322 126 10463	CAP 2.2UF 6.3V
			2681	5322 122 32654	CAP 22NF 63V
			2682	4822 126 10002	CAP 100NF 25V
			2686	4822 122 33339	CAP 4.7NF 50V

Pos.	Parts code	Description	Pos.	Parts code	Description
2687	5322 122 32269	CAP 6.8PF 50V	3607,08	4822 051 20821	RES 820 0.1W
2689	4822 126 10002	CAP 100NF 25V	3610	4822 051 20272	RES 2K7 0.1W
2692,93	4822 126 10002	CAP 100NF 25V	3611	4822 116 90336	RES 100
2695	4822 126 10002	CAP 100NF 25V	3615	4822 051 20223	RES 22K 0.1W
3501	4822 051 20332	RES 3K3 0.1W	3616	4822 111 91499	RES 270 0.06W
3502	4822 051 20123	RES 12K 0.1W	3617	4822 051 10123	RES 12K 0.25W
3503	4822 051 20561	RES 560 0.1W	3618	4822 051 10303	RES 30K 0.25W
3504	4822 051 20102	RES 1K 0.1W	3619,20	4822 051 10103	RES 10K 0.25W
3505	4822 051 20222	RES 2K2 0.1W	3621	4822 051 10153	RES 15K 0.25W
3506	4822 116 90338	RES 1K5	3625	4822 051 20391	RES 390 0.1W
3507	4822 051 20102	RES 1K 0.1W	3628	4822 100 11662	TRIMMER 68UF
3508	4822 051 20821	RES 820 0.1W	3629	4822 051 20133	RES 13K 0.1W
3509	4822 116 90336	RES 100	3630	4822 051 20363	RES 36K 0.1W
3510	5322 101 11084	RES 470 0.25W	3634	5322 116 90218	RES 8K2 0.06W
3512	4822 051 20332	RES 3K 0.1W	3641-43	4822 051 20223	RES 22K 0.1W
3516	4822 051 20821	RES 820 0.1W	3644	5322 116 90218	RES 8K2 0.06W
3520-22	4822 051 20102	RES 1K 0.1W	3645-50	4822 051 20223	RES 22K 0.1W
3523	4822 051 20829	RES 82 0.1W	3654,55	4822 051 20223	RES 22K 0.1W
3524	4822 116 90338	RES 1K	3656,57	4822 051 20102	RES 1K 0.1W
3525	4822 051 20473	RES 47K 0.1W	3658,59	4822 051 20123	RES 12K 0.1W
3526	4822 051 20331	RES 330 0.1W	3660	4822 051 20102	RES 1K 0.1W
3527	4822 051 20102	RES 1K 0.1W	3661,62	4822 051 20123	RES 12K 0.1W
3530	4822 051 20102	RES 1K 0.1W	3663	4822 051 20102	RES 1K 0.1W
3531	4822 051 20829	RES 82 0.1W	3664	4822 051 20394	RES 390K 0.1W
3532	4822 051 20473	RES 47K 0.1W	3666	5322 100 11611	RES 4K7 0.3W
3533	4822 116 90338	RES 1K5	3667	4822 051 20473	RES 47K 0.1W
3534,35	4822 051 20331	RES 330 0.1W	3668	4822 051 20393	RES 39K 0.1W
3536,37	4822 051 20222	RES 2K2 0.1W	3669	4822 051 20303	RES 30K 0.1W
3538-41	4822 051 20473	RES 47K 0.1W	3670	4822 051 20393	RES 39K 0.1W
3542	4822 051 20223	RES 22K 0.1W	3671	5322 101 11082	RES 47K 0.25W
3543	4822 051 20102	RES 1K 0.1W	3672	4822 051 20202	RES 2K 0.1W
3544	4822 051 20123	RES 12K 0.1W	3673,74	4822 051 20333	RES 33K 0.1W
3545	4822 051 20223	RES 22K 0.1W	3675	4822 051 20394	RES 390K 0.1W
3546	4822 051 20473	RES 47K 0.1W	3676	4822 051 20225	RES 2M 0.1W
3547,48	4822 051 20331	RES 330 0.1W	3677	4822 051 20472	RES 4K7 0.1W
3549	4822 051 20221	RES 220 0.1W	3678	4822 051 20222	RES 2K2 0.1W
3550	4822 051 20102	RES 1K 0.1W	3679	4822 051 20163	RES 16K 0.1W
3551	4822 051 20221	RES 220 0.1W	3680	5322 116 90218	RES 8K2 0.06W
3552	4822 051 20202	RES 2K 0.1W	3681	4822 051 20333	RES 33K 0.1W
3553	4822 051 20123	RES 12K 0.1W	3682	4822 051 20122	RES 1K2 0.1W
3554	4822 051 20331	RES 330 0.1W	3683	4822 051 20102	RES 1K 0.1W
3555	4822 051 20332	RES 3K3 0.1W	3686	4822 051 20104	RES 100K 0.1W
3556	4822 051 20331	RES 330 0.1W	3687	4822 051 20222	RES 2K2 0.1W
3557,58	4822 051 20821	RES 820 0.1W	3688	4822 051 20471	RES 470 0.1W
3559	4822 116 90336	RES 100	3689	4822 051 20472	RES 4K7 0.1W
3560	4822 051 20272	RES 2K7 0.1W	3690	4822 051 20102	RES 1K 0.1W
3565	4822 051 20223	RES 22K 0.1W	3691	4822 111 91499	RES 270 0.06W
3567	4822 051 20391	RES 390 0.1W	3692	5322 101 11082	RES 47K 0.25W
3570	4822 100 11662	TRIMMER 68UF	3693,94	4822 051 20103	RES 10K 0.1W
3571	4822 051 20133	RES 13K 0.1W	3695	4822 051 20272	RES 2K7 0.1W
3572	4822 051 20363	RES 36K 0.1W	3696	4822 111 91504	RES 680
3575	4822 051 20183	RES 18K 0.1W	3697	4822 051 20303	RES 30K 0.1W
3586	4822 051 20223	RES 22K 0.1W	5500	4822 157 62882	COIL 6.8UH
3587	4822 051 20223	RES 22K 0.1W	5503	4822 157 62882	COIL 6.8UH
3589	4822 051 20562	RES 5K6 0.1W	5504	4822 157 62896	B.P.FILTER
3591	4822 051 20123	RES 12K 0.1W	5505	4822 157 62882	COIL 6.8UH
3592	4822 051 20223	RES 22K 0.1W	5520	4822 157 62894	B.P.FILTER
3594	4822 051 20223	RES 22K 0.1W	5527	4822 157 62893	B.P.FILTER
3595	4822 051 20102	RES 1K 0.1W	5635	4822 157 62882	COIL 6.8UH
3597	4822 051 20331	RES 330 0.1W	5641	4822 157 62882	COIL 6.8UH
3598	4822 051 20221	RES 220 0.1W	6512	5322 130 34337	DIODE BAV99
3599	4822 051 20331	RES 330 0.1W	6575	5322 130 31928	DIODE BAS16
3600	4822 051 20102	RES 1K 0.1W	6660	5322 130 31928	DIODE BAS16
3601	4822 051 20202	RES 2K 0.1W	6663	5322 130 31928	DIODE BAS16
3602	4822 051 20221	RES 220 0.1W	6688	5322 130 31928	DIODE BAS16
3603	4822 051 20123	RES 12K 0.1W	6689	5322 130 34337	DIODE BAV99
3604	4822 051 20331	RES 330 0.1W	6695	5322 130 31928	DIODE BAS16
3605	4822 051 20332	RES 3K3 0.1W	7501	5322 130 41982	TR BC848B
3606	4822 051 20331	RES 330 0.1W			

Pos.	Parts code	Description	Pos.	Parts code	Description
7506	4822 209 63444	IC PC74HC4050T	3715	4822 051 20473	RES 47K 0.1W
7507	5322 130 44336	TR BSV52	3716	4822 051 20103	RES 10K 0.1W
7513	5322 130 41982	TR BC848B	3717	4822 051 20104	RES 100K 0.1W
7524	5322 130 44336	TR BSV52	3720	4822 100 11661	RES 100K
7525	5322 130 41982	TR BC848B	3721	4822 051 20224	RES 220K 0.1W
7530	5322 130 44336	TR BSV52	3722	4822 051 20103	RES 10K 0.1W
7533	5322 130 41982	TR BC848B	3723	4822 051 20203	RES 20K 0.1W
7538	5322 209 14481	IC HEF4053BT	3724	4822 051 20303	RES 30K 0.1W
7543	5322 130 41982	TR BC848B	3726,27	4822 051 20104	RES 100K 0.1W
7547-51	5322 130 41982	TR BC848B	3730	4822 051 20683	RES 68K 0.1W
7556	5322 130 41983	TR BC858B	3731	4822 051 20103	RES 10K 0.1W
7557	4822 130 60887	TR BF840	3734	4822 051 20105	RES 1M 0.1W
7558	5322 130 41982	TR BC848B	3735,36	4822 051 20473	RES 47K 0.1W
7561	5322 209 14542	IC HEF4066BT	3737	4822 051 20105	RES 1M 0.1W
7575	4822 209 63463	IC PC74HCT4520T	3738	4822 116 90361	RES 180K 0.1W
7578	5322 209 11297	IC HEF4040BT	3740	4822 051 20183	RES 18K 0.1W
7579	5322 209 14482	IC HEF4069UBT	3741	4822 051 20303	RES 30K 0.1W
7583,84	5322 209 11303	IC HEF4021BT	3742	4822 100 11662	TRIMMER 68UF
7585	5322 209 14543	IC HEF4071BT	3743	4822 051 20303	RES 30K 0.1W
7586,87	5322 209 14483	IC HEF4081BT	3747	4822 051 10223	RES 22K 0.25W
7588	5322 130 41982	TR BC848B	3750,51	4822 051 20103	RES 10K 0.1W
7595	5322 130 41982	TR BC848B	3752	4822 051 20683	RES 68K 0.1W
7597,98	5322 130 41982	TR BC848B	3753	4822 116 80464	RES 4R7 0.6W
7600-02	5322 130 41982	TR BC848B	3754	4822 051 20683	RES 68K 0.1W
7605	5322 130 41983	TR BC858B	3755	4822 116 80464	RES 4R7 0.6W
7607	5322 130 41982	TR BC848B	3756,57	4822 051 20683	RES 68K 0.1W
7608	4822 130 60887	TR BF840	5700	4822 157 62883	COIL 22UH
7615	4822 209 63445	IC TL084CD	6715	4822 130 33997	DIODE BAS19
7616	4822 209 62581	IC TL431CD	6750,51	4822 130 81424	DIODE BZV46-C2V0
7617	5322 209 14542	IC HEF4066BT	6756	4822 130 81032	DIODE BAS56
7618	5322 209 83125	IC LM324D	7702	5322 130 50461	PHOTOCEL GP2S05
7619	5322 209 14542	IC HEF4066BT	7708	5322 209 14481	IC HEF4053BT
7633	5322 209 14477	IC HEF4013BT	7711	5322 209 82941	IC LM358D
7635	5322 209 14476	IC HEF4011BT	7722	5322 209 60154	IC NE555D
7644	5322 209 14481	IC HEF4053BT	7730	5322 130 41982	TR BC848B
7649	5322 209 11998	IC PCF8591T	7731	5322 209 11435	IC HEF4046BT
7655,56	4822 209 70886	IC BA6208F	7735	4822 209 63442	IC TLC25M2CD
7657	5322 209 11998	IC PCF8591T	7750	5322 209 82941	IC LM358D
7664	5322 209 83125	IC LM324D	7752	4822 130 42655	TR BC808-40
7677	5322 130 41983	TR BC858B	7753	4822 130 42616	TR BC818-40
7680	5322 209 14481	IC HEF4053BT	7757	4822 130 42616	TR BC818-40
7685	4822 209 63445	IC TL084CD	7758	4822 130 42655	TR BC808-40
7689	5322 209 14481	IC HEF4053BT	FF Chopper P.W.B.		
7695	4822 209 63445	IC TL084CD			
SM Chopper P.W.B.			2760	4822 126 11216	CAP 22UF 6.3V
2700	4822 126 11216	CAP 22UF 6.3V	2761	4822 126 10002	CAP 100NF 25V
2701	4822 126 10002	CAP 100NF 25V	2763	5322 122 34123	CAP 1NF 50V
2703	5322 122 34123	CAP 1NF 50V	2771	5322 122 34098	CAP 10NF 63V
2711	5322 122 34098	CAP 10NF 63V	2776	5322 122 32654	CAP 22NF 63V
2716	5322 122 32654	CAP 22NF 63V	2783	5322 126 10785	CAP 100NF 63V
2722,23	5322 122 34098	CAP 10NF 63V	2784	5322 122 34098	CAP 10NF 63V
2737	5322 122 34098	CAP 10NF 63V	2796	4822 122 32916	CAP 220NF 63V
2738	4822 122 32915	CAP 180NF 50V	2797	5322 122 34098	CAP 10NF 63V
2739	4822 122 32916	CAP 220NF 63V	2798	4822 122 32915	CAP 180NF 50V
2740,41	5322 126 10463	CAP 2.2UF 6.3V	2799	5322 126 10463	CAP 2.2UF 6.3V
2751	4822 126 10002	CAP 100NF 25V	2800	5322 126 10463	CAP 2.2UF 6.3V
2756	4822 126 10002	CAP 100NF 25V	2812	4822 126 10002	CAP 100NF 25V
3702	4822 051 20201	RES 200 0.1W	2816	4822 126 10002	CAP 100NF 25V
3703	4822 051 20103	RES 10K 0.1W	3762	4822 051 20201	RES 200 0.1W
3704	4822 051 20303	RES 30K 0.1W	3763,64	4822 051 20103	RES 10K 0.1W
3705	4822 100 11662	TRIMMER 68UF	3765	5322 101 11082	RES 47K 0.25W
3706	4822 051 20223	RES 22K 0.1W	3766	4822 051 20103	RES 10K 0.1W
3707,08	4822 051 20473	RES 47K 0.1W	3767,68	4822 051 20473	RES 47K 0.1W
3710	4822 051 20203	RES 20K 0.1W	3770	4822 051 20203	RES 20K 0.1W
3711	4822 051 20105	RES 1M 0.1W	3771	4822 051 20105	RES 1M 0.1W
3712	4822 051 20203	RES 20K 0.1W	3772	4822 051 20203	RES 20K 0.1W
3713	4822 051 20103	RES 10K 0.1W	3773	4822 051 20103	RES 10K 0.1W
			3775	4822 051 20473	RES 47K 0.1W

Pos.	Parts code	Description	Pos.	Parts code	Description
3776	4822 051 20103	RES 10K 0.1W	3914,15	4822 051 20102	RES 1K 0.1W
3777	4822 051 20474	RES 470K 0.1W	3916	4822 051 20622	RES 6K2 0.1W
3780	5322 101 11082	RES 47K 0.25W	3917	4822 051 20272	RES 2K7 0.1W
3781	4822 051 20104	RES 100K 0.1W	3920,21	4822 051 20821	RES 820 0.1W
3782	4822 051 20103	RES 10K 0.1W	3922	4822 111 91504	RES 680
3783	4822 051 20203	RES 20K 0.1W	3923	4822 051 20562	RES 5K6 0.1W
3784	4822 051 20303	RES 30K 0.1W	3925	4822 116 90346	RES 6K8
3786,87	4822 051 20104	RES 100K 0.1W	3926,27	4822 051 20562	RES 5K6 0.1W
3790	4822 051 20683	RES 68K 0.1W	3928	4822 051 20203	RES 20K 0.1W
3791	4822 051 20103	RES 10K 0.1W	3929	4822 100 11663	RES 10K
3794	4822 051 20105	RES 1M 0.1W	3932	4822 051 20221	RES 220 0.1W
3795,96	4822 051 20473	RES 47K 0.1W	3933-35	4822 051 20103	RES 10K 0.1W
3797	4822 051 20105	RES 1M 0.1W	3936,37	4822 051 20105	RES 1M 0.1W
3798	4822 051 20334	RES 330K 0.1W	5901	4822 157 62883	COIL 22UH
3799	4822 051 20183	RES 18K 0.1W	* 5930	4822 148 60188	TRANSFORMER
3800	4822 051 20473	RES 47K 0.1W	5936,37	4822 157 62883	COIL 22UH
3801	5322 100 11611	RES 4K7 0.3W	6934	5322 130 31928	DIODE BAS16
3802	4822 051 20473	RES 47K 0.1W	6935,36	4822 130 33702	DIODE BAS21
3807	4822 051 10688	RES 6R8 0.25W	7904	4822 209 73157	IC NJM3415M
3810	4822 116 80464	RES 4R7 0.6W	7920	4822 209 63447	IC MC1496D
3811	4822 051 20683	RES 68K 0.1W	7933	5322 130 41982	TR BC848B
3812,13	4822 051 20103	RES 10K 0.1W	7935	4822 130 61261	TR BF822
3814	4822 051 20683	RES 68K 0.1W	7936	4822 130 61924	TR BF823
3815	4822 116 80464	RES 4R7 0.6W	Sensor P.W.B.		
3816,17	4822 051 20683	RES 68K 0.1W			
5760	4822 157 62883	COIL 22UH	1037	4822 209 63439	CCD NXA1221
6775	4822 130 33997	DIODE BAS19	2941	4822 126 11224	CAP 1UF 35V
6812,13	4822 130 81424	DIODE BZV46-C2V0	2942	4822 126 10002	CAP 100NF 25V
7762	5322 130 50461	PHOTOCEL GP2S05	2943	4822 126 11224	CAP 1UF 35V
7768	5322 209 14481	IC HEF4053BT	2944,45	4822 126 10002	CAP 100NF 25V
7771	5322 209 82941	IC LM358D	2946	4822 126 11224	CAP 1UF 35V
7782	5322 209 60154	IC NE555D	2947	4822 126 10002	CAP 100NF 25V
7791	5322 130 41982	TR BC848B	2950	4822 126 11224	CAP 1UF 35V
7792	5322 209 11435	IC HEF4046BT	2951	4822 126 10002	CAP 100NF 25V
7795	4822 209 63442	IC TLC25M2CD	2952	4822 126 11224	CAP 1UF 35V
7811	5322 209 82941	IC LM358D	2953	4822 126 10002	CAP 100NF 25V
7812	4822 130 42655	TR BC808-40	2958	4822 126 11224	CAP 1UF 35V
7813	4822 130 42616	TR BC818-40	2968	4822 126 10002	CAP 100NF 25V
7816	4822 130 42616	TR BC818-40	2970-72	5322 122 32658	CAP 22PF 50V
7817	4822 130 42655	TR BC808-40	2975	4822 126 10002	CAP 100NF 25V
Piezo P.W.B.			3950	4822 051 20102	RES 1K 0.1W
			3952	4822 051 20102	RES 1K 0.1W
2900,01	4822 126 11221	CAP 10UF 16V	3956,57	4822 051 20103	RES 10K 0.1W
2902	4822 126 10002	CAP 100NF 25V	3958	4822 051 20109	RES 10 0.1W
2903	4822 126 11231	CAP 33NF 5V	3959-64	4822 051 20103	RES 10K 0.1W
2904	4822 126 10002	CAP 100NF 25V	3966-69	4822 051 20103	RES 10K 0.1W
2905	4822 126 11219	CAP 1UF 16V	7956	4822 130 62539	TR BC850C
2906	4822 126 11221	CAP 10UF 16V	7959	4822 130 62539	TR BC850C
2907	4822 126 10002	CAP 100NF 25V	7961	4822 130 62539	TR BC850C
2910	4822 122 33797	CAP 47NF 50V	7963	4822 130 62539	TR BC850C
2911	4822 126 11221	CAP 10UF 16V	7966	4822 130 62539	TR BC850C
2912	4822 122 33797	CAP 47NF 50V	7968	4822 130 62539	TR BC850C
2913	4822 126 11216	CAP 22UF 6.3V	Auto White Balance P.W.B.		
2914	4822 126 11231	CAP 33NF 5V			
2922	4822 126 10002	CAP 100NF 25V	2615	4822 126 10002	CAP 100NF 25V
2925	4822 126 10002	CAP 100NF 25V	2622	4822 122 33797	CAP 47NF 50V
2926	4822 126 11219	CAP 1UF 16V	2633	4822 126 10002	CAP 100NF 25V
2930	4822 126 10002	CAP 100NF 25V	2665	4822 126 10002	CAP 100NF 25V
2931	4822 124 21496	CAP 22UF 16V	2672	4822 122 33797	CAP 47NF 50V
2934	4822 126 11221	CAP 10UF 16V	2683	4822 126 10002	CAP 100NF 25V
2936,37	4822 126 11231	CAP 33NF 5V	3610,11	4822 051 20153	RES 15K 0.1W
3901	4822 051 20104	RES 100K 0.1W	3612	5322 100 11611	RES 4K7 0.3W
3902	4822 051 20163	RES 16K 0.1W	3613	4822 051 20155	RES 1M5 0.1W
3903	4822 051 20473	RES 47K 0.1W	3614	4822 051 20105	RES 1M 0.1W
3904,05	4822 051 20562	RES 5K6 0.1W	3615	4822 051 20564	RES 560K 0.1W
3910	4822 051 20332	RES 3K3 0.1W	3620	4822 051 20333	RES 33K 0.1W
3911,12	4822 051 20102	RES 1K 0.1W	3621,22	4822 051 20105	RES 1M 0.1W
3913	4822 051 20182	RES 1K8 0.1W	3623	4822 051 20102	RES 1K 0.1W

Pos.	Parts code	Description	Pos.	Parts code	Description
3624	4822 051 20154	RES 150K 0.1W	2099	4822 122 33064	CAP 330NF 25V
3629	4822 051 20124	RES 120K 0.1W	2100,01	4822 122 33064	CAP 330NF 25V
3630	4822 100 11743	RES 220K	2102	4822 126 10002	CAP 100NF 25V
3631	4822 051 20183	RES 18K 0.1W	2103	4822 122 33064	CAP 330NF 25V
3632	5322 100 11611	RES 4K7 0.3W	2104	4822 126 10002	CAP 100NF 25V
3633	4822 051 20153	RES 15K 0.1W	2105	5322 122 32965	CAP 18PF 50V
3660,61	4822 051 20473	RES 47K 0.1W	2106	4822 122 33064	CAP 330NF 25V
3662	5322 100 11611	RES 4K7 0.3W	2107	4822 126 11217	CAP 47UF 6.3V
3663	4822 051 20275	RES 2M7 0.1W	2110	4822 126 11228	CAP 3.3UF 16V
3664	4822 051 20105	RES 1M 0.1W	2111	4822 126 10002	CAP 100NF 25V
3670	4822 051 20333	RES 33K 0.1W	2112-14	4822 122 33064	CAP 330NF 25V
3671,72	4822 051 20105	RES 1M 0.1W	2115	4822 126 10002	CAP 100NF 25V
3673	4822 051 20102	RES 1K 0.1W	2116-18	4822 122 33064	CAP 330NF 25V
3674	4822 051 20154	RES 150K 0.1W	2119-21	5322 122 32965	CAP 18PF 50V
3679	4822 051 20303	RES 30K 0.1W	2122	4822 126 11228	CAP 3.3UF 16V
3680	4822 100 11661	RES 100K 0.1W	2123	4822 126 10002	CAP 100NF 25V
3681	4822 051 20333	RES 33K 0.1W	2124-26	4822 122 33064	CAP 330NF 25V
3683	4822 051 20223	RES 22K 0.1W	2127	4822 126 10002	CAP 100NF 25V
6615	5322 130 31928	DIODE BAS16	2128-30	4822 122 33064	CAP 330NF 25V
7613	5322 209 83125	IC LM324D	2133	4822 126 11219	CAP 1UF 16V
7663	5322 209 71553	IC NE532D	2134	4822 126 10002	CAP 100NF 25V
Main P.W.B.(consist of Pre-Process, Colour Process-1, Colour Process-2 and Timing P.W.B.)			2135-37	4822 122 33064	CAP 330NF 25V
1005	4822 242 73884	X-TAL 17MHz	2138	4822 126 10002	CAP 100NF 25V
2001	4822 126 11215	CAP 6.8UF 6.3V	2139-41	4822 122 33064	CAP 330NF 25V
2002	4822 126 10002	CAP 100NF 25V	2142-44	5322 122 32448	CAP 10PF 50V
2004	4822 125 60164	CAP TRIMMER	2145	4822 126 11219	CAP 1UF 16V
2006	5322 122 32967	CAP 5.6PF 50V	2146	4822 126 10002	CAP 100NF 25V
2007	4822 126 10002	CAP 100NF 25V	2147-49	4822 122 33064	CAP 330NF 25V
2008	5322 122 34123	CAP 1NF 50V	2150	4822 126 10002	CAP 100NF 25V
2009	5322 122 32448	CAP 10PF 50V	2151-53	4822 122 33064	CAP 330NF 25V
2010	4822 126 10002	CAP 100NF 25V	2154-56	5322 122 32448	CAP 10PF 50V
2011,12	5322 122 32531	CAP 100PF 50V	2159	5322 122 34098	CAP 10NF 63V
2013	4822 126 10002	CAP 100NF 25V	2160	4822 126 11218	CAP 4.7UF 10V
2014	5322 122 32448	CAP 10PF 50V	2163	5322 122 34098	CAP 10NF 63V
2015	4822 126 10002	CAP 100NF 25V	2164	4822 126 11218	CAP 4.7UF 10V
2042	4822 126 10002	CAP 100NF 25V	2171	4822 126 10002	CAP 100NF 25V
2048	4822 126 11215	CAP 6.8UF 6.3V	2174	5322 122 34098	CAP 10NF 63V
2049	4822 126 10002	CAP 100NF 25V	2175	4822 126 11219	CAP 1UF 16V
2051	4822 126 11215	CAP 6.8UF 6.3V	2181	5322 122 34098	CAP 10NF 63V
2052	4822 122 32139	CAP 12PF 63V	2183	4822 126 11218	CAP 4.7UF 10V
2054	4822 126 10002	CAP 100NF 25V	2188	5322 122 34098	CAP 10NF 63V
2056	5322 122 31861	CAP 1500PF 63V	2190	4822 126 11219	CAP 1UF 16V
2058	5322 126 10463	CAP 2.2UF 6.3V	2199	5322 122 32448	CAP 10PF 50V
2059	5322 122 34123	CAP 1NF 50V	2204	4822 126 11225	CAP 22UF 16V
2060	5322 122 32448	CAP 10PF 50V	2205	4822 126 11215	CAP 6.8UF 6.3V
2061	4822 126 10002	CAP 100NF 25V	2206	4822 126 11224	CAP 1UF 35V
2063	4822 126 10002	CAP 100NF 25V	2207	4822 126 11221	CAP 10UF 16V
2066	4822 126 10002	CAP 100NF 25V	2208	4822 126 11216	CAP 22UF 6.3V
2069	4822 126 10002	CAP 100NF 25V	2209	4822 126 11222	CAP 2.2UF 20V
2070	4822 126 11215	CAP 6.8UF 6.3V	2211	4822 126 11224	CAP 1UF 35V
2071-78	4822 126 10002	CAP 100NF 25V	2216	4822 126 10002	CAP 100NF 25V
2079	5322 122 32531	CAP 100PF 50V	2217	4822 126 11224	CAP 1UF 35V
2080	4822 126 11216	CAP 22UF 6.3V	2218,19	4822 126 11223	CAP 4.7UF 25V
2081	4822 126 11225	CAP 22UF 16V	2223-25	4822 122 33064	CAP 330NF 25V
2082	4822 126 11215	CAP 6.8UF 6.3V	2226	4822 126 11218	CAP 4.7UF 10V
2083	5322 122 32531	CAP 100PF 50V	2230,31	4822 126 11219	CAP 1UF 16V
2086	4822 126 10002	CAP 100NF 25V	2232	4822 122 31947	CAP 100NF 63V
2087	4822 126 11228	CAP 3.3UF 16V	2233,34	4822 126 10002	CAP 100NF 25V
2088	4822 126 10002	CAP 100NF 25V	2235	5322 122 34123	CAP 1NF 50V
2089-91	4822 122 33064	CAP 330NF 25V	2236-38	5322 122 32965	CAP 18PF 50V
2092	4822 126 10002	CAP 100NF 25V	2239	4822 126 10002	CAP 100NF 25V
2093	4822 126 10326	CAP 180PF 50V	2241,42	4822 126 11219	CAP 1UF 16V
2094,95	5322 122 32965	CAP 18PF 50V	2243,44	4822 126 10002	CAP 100NF 25V
2096	4822 126 11228	CAP 3.3UF 16V	2245	5322 122 34123	CAP 1NF 50V
2097,98	4822 126 10002	CAP 100NF 25V	2246-48	5322 122 32965	CAP 18PF 50V
			2249	4822 126 10002	CAP 100NF 25V
			2250,51	4822 126 11219	CAP 1UF 16V
			2252,53	4822 126 10002	CAP 100NF 25V

Pos.	Parts code	Description	Pos.	Parts code	Description
2254	5322 122 34123	CAP 1NF 50V	2973	4822 126 10002	CAP 100NF 25V
2255-57	5322 122 32965	CAP 18PF 50V	2976	4822 126 10002	CAP 100NF 25V
2258	4822 126 10002	CAP 100NF 25V	2991	4822 126 10002	CAP 100NF 25V
2261	4822 126 10002	CAP 100NF 25V	2995,96	4822 126 10002	CAP 100NF 25V
2265	4822 126 10002	CAP 100NF 25V	2997	4822 122 33174	CAP 1.5NF 50V
2268	4822 126 10002	CAP 100NF 25V	3001	4822 051 20109	RES 10 0.1W
2282	4822 121 41815	CAP 10NF 100V	3002	4822 051 20102	RES 1K 0.1W
2283	4822 126 10002	CAP 100NF 25V	3005	4822 051 20473	RES 47K 0.1W
2287	5322 122 32447	CAP 1PF 50V	3006	4822 116 90336	RES 100
2290	4822 126 10002	CAP 100NF 25V	3007	5322 101 11082	V RES 47K
2301	4822 121 41815	CAP 10NF 100V	3008	4822 051 20273	RES 27K 0.1W
2304	4822 126 10002	CAP 100NF 25V	3009,10	4822 051 20223	RES 22K 0.1W
2305	5322 122 32448	CAP 10PF 50V	3011,12	4822 116 90346	RES 6K8
2310	5322 122 32447	CAP 1PF 50V	3042	4822 051 20683	RES 68K 0.1W
2312	4822 126 10002	CAP 100NF 25V	3043	4822 051 20563	RES 56K 0.1W
2315	4822 126 10002	CAP 100NF 25V	3044	4822 051 20393	RES 39K 0.1W
2317	4822 121 41815	CAP 10NF 100V	3045	4822 051 20473	RES 47K 0.1W
2321	4822 126 11227	CAP 68UF 6.3V	3046	4822 051 20829	RES 82 0.1W
2322	4822 124 40731	CAP 330UF 6.3V	3047	4822 051 20393	RES 39K 0.1W
2325	5322 122 32447	CAP 1PF 50V	3048	4822 051 20103	RES 10K 0.1W
2326	4822 126 11227	CAP 68UF 6.3V	3049	5322 116 90218	RES 8K2 0.06W
2328	4822 126 11214	CAP 10NF 4V	3051	4822 051 20109	RES 10 0.1W
2330	4822 126 10002	CAP 100NF 25V	3056	5322 116 80429	RES 100K 0.125W
2331	4822 126 11215	CAP 6.8UF 6.3V	3057	4822 051 20103	RES 10K 0.1W
2332	4822 126 11218	CAP 4.7UF 10V	3058	4822 051 20123	RES 12K 0.1W
2333-39	4822 126 10002	CAP 100NF 25V	3059	4822 051 20221	RES 220 0.1W
2345	4822 126 11215	CAP 6.8UF 6.3V	3060	4822 051 20102	RES 1K 0.1W
2351	4822 126 11219	CAP 1UF 16V	3061	4822 051 20473	RES 47K 0.1W
2352	4822 126 10002	CAP 100NF 25V	3062,63	4822 051 20109	RES 10 0.1W
2353,54	4822 126 11214	CAP 10NF 4V	3064,65	4822 051 20684	RES 680K 0.1W
2355	4822 126 11229	CAP 33UF 4V	3066	4822 051 20109	RES 10 0.1W
2358,59	4822 126 10002	CAP 100NF 25V	3067	4822 051 20473	RES 47K 0.1W
2362	4822 126 10002	CAP 100NF 25V	3072	4822 051 20102	RES 1K 0.1W
2363-66	4822 126 11219	CAP 1UF 16V	3073	4822 051 20821	RES 820 0.1W
2367-70	4822 126 10002	CAP 100NF 25V	3074	4822 051 20472	RES 4K7 0.1W
2371	4822 126 11215	CAP 6.8UF 6.3V	3075-77	4822 051 20105	RES 1M 0.1W
2372-80	4822 126 10002	CAP 100NF 25V	3078	4822 051 20242	RES 2K4 0.1W
2381	4822 126 11216	CAP 22UF 6.3V	3080	4822 051 20102	RES 1K 0.1W
2383,84	4822 126 10002	CAP 100NF 25V	3086-88	4822 051 20151	RES 150 0.1W
2387	4822 126 10002	CAP 100NF 25V	3097	4822 116 90336	RES 100
2389	4822 126 10002	CAP 100NF 25V	3098,99	4822 051 20151	RES 150 0.1W
2393	4822 126 10002	CAP 100NF 25V	3100	4822 051 20151	RES 150 0.1W
2395,96	4822 126 10002	CAP 100NF 25V	3101	4822 051 20224	RES 220K 0.1W
2399	5322 126 10463	CAP 2.2UF 6.3V	3104	4822 051 20182	RES 1K8 0.1W
2402	4822 126 10002	CAP 100NF 25V	3110-12	4822 051 20151	RES 150 0.1W
2406	4822 126 10002	CAP 100NF 25V	3123-25	4822 051 20151	RES 150 0.1W
2412	4822 126 10002	CAP 100NF 25V	3133	4822 051 20109	RES 10 0.1W
2416	4822 126 11219	CAP 1UF 16V	3142-44	4822 051 10109	RES 10 0.25W
2417	4822 126 10002	CAP 100NF 25V	3145	4822 051 20109	RES 10 0.1W
2418	5322 122 32448	CAP 10PF 50V	3154-56	4822 051 20109	RES 10 0.1W
2419-21	4822 126 10002	CAP 100NF 25V	3157,58	4822 051 20474	RES 470K 0.1W
2423	4822 126 11216	CAP 22UF 6.3V	3159	4822 100 11663	V RES 10K
2424	4822 126 10002	CAP 100NF 25V	3160	4822 116 90336	RES 100
2426	4822 126 10002	CAP 100NF 25V	3161	4822 051 20102	RES 1K 0.1W
2432,33	4822 126 10002	CAP 100NF 25V	3164	4822 051 20474	RES 470K 0.1W
2437,38	4822 126 10002	CAP 100NF 25V	3166	4822 051 20272	RES 2K7 0.1W
2442	4822 126 10002	CAP 100NF 25V	3167	4822 100 11663	V RES 10K
2443	4822 126 11219	CAP 1UF 16V	3168	4822 051 20272	RES 2K7 0.1W
2444-46	4822 126 10002	CAP 100NF 25V	3169,70	4822 051 20474	RES 470K 0.1W
2447	4822 122 33575	CAP 220PF 50V	3172-73	4822 051 20474	RES 470K 0.1W
2448	4822 126 10002	CAP 100NF 25V	3174	4822 051 20104	RES 100K 0.1W
2449	4822 126 11216	CAP 22UF 6.3V	3175	4822 051 20103	RES 10K 0.1W
2450	4822 126 10002	CAP 100NF 25V	3176	4822 100 11661	V RES 100K
2451	5322 122 32967	CAP 5.6PF 50V	3177	4822 116 90338	RES 1K5
2452	4822 126 10002	CAP 100NF 25V	3178	4822 100 11663	V RES 10K
2501	4822 126 10002	CAP 100NF 25V	3179	4822 116 90338	RES 1K5
2701	4822 126 11226	CAP 0.47U 25V	3181-83	4822 051 20474	RES 470K 0.1W
2964	4822 126 10002	CAP 100NF 25V	3184	4822 116 90346	RES 6K8
			3185	4822 100 11663	V RES 10K


Pos.	Parts code	Description	Pos.	Parts code	Description
3186	4822 116 90336	RES 100	3316	4822 051 20473	RES 47K 0.1W
3188-90	4822 051 20474	RES 470K 0.1W	3317	4822 051 20221	RES 220 0.1W
3191	4822 100 11663	V RES 10K	3318	4822 051 20512	RES 5K1 0.1W
3192,93	4822 051 20332	RES 3K3 0.1W	3319	4822 051 20511	RES 510 0.1W
3197	4822 051 20561	RES 560 0.1W	3320	4822 116 90336	RES 100
3198	4822 051 20242	RES 2K4 0.1W	3321	4822 051 20102	RES 1K 0.1W
3199	4822 051 20102	RES 1K 0.1W	3322	4822 051 20122	RES 1K2 0.1W
3200	4822 116 82803	RES 5K76	3323	4822 051 20102	RES 1K 0.1W
3201	5322 116 82367	RES 3K16 0.125W	3326	4822 051 20221	RES 220 0.1W
3205	4822 051 20472	RES 4K7 0.1W	3327	4822 051 20751	RES 750 0.1W
3207	4822 116 90336	RES 100	3328	4822 051 20102	RES 1K 0.1W
3208	4822 100 11663	V RES 10K	3329	4822 116 90338	RES 1K5
3209	4822 051 20332	RES 3K3 0.1W	3330	4822 116 90336	RES 100
3210	4822 100 11663	V RES 10K	3331	4822 116 30411	RES 330K 0.25W
3211	4822 051 20153	RES 15K 0.1W	3332	4822 116 90336	RES 100
3213	4822 116 90336	RES 100	3333	4822 051 20103	RES 10K 0.1W
3214	4822 100 11663	V RES 10K	3334-39	5322 101 11082	V RES 47K
3215	4822 051 20223	RES 22K 0.1W	3340	4822 051 20223	RES 22K 0.1W
3216	4822 051 20473	RES 47K 0.1W	3341	4822 051 20472	RES 4K7 0.1W
3217	4822 051 20103	RES 10K 0.1W	3342	4822 051 20683	RES 68K 0.1W
3218	4822 116 90336	RES 100	3343	4822 051 20221	RES 220 0.1W
3219	4822 051 20103	RES 10K 0.1W	3344	4822 051 20684	RES 680K 0.1W
3222-24	4822 051 20474	RES 470K 0.1W	3345	4822 051 20334	RES 330K 0.1W
3225	4822 051 20273	RES 27K 0.1W	3346	4822 051 20472	RES 4K7 0.1W
3226	4822 100 11663	V RES 10K	3347	4822 116 90346	RES 6K8
3227	4822 051 20472	RES 4K7 0.1W	3348	4822 051 20472	RES 4K7 0.1W
3229	4822 051 20103	RES 10K 0.1W	3349	5322 100 11611	V RES 4K7
3230	4822 116 90336	RES 100	3350,51	5322 101 11082	V RES 47K
3234	4822 051 20479	RES 47 0.1W	3352	5322 100 11611	V RES 4K7
3235	4822 051 20102	RES 1K 0.1W	3353	4822 051 20224	RES 220K 0.1W
3244	4822 051 20479	RES 47 0.1W	3354	4822 051 20683	RES 68K 0.1W
3245	4822 051 20102	RES 1K 0.1W	3355	4822 100 11662	TRIMMER
3252	4822 051 20479	RES 47 0.1W	3356	4822 051 20223	RES 22K 0.1W
3254	4822 051 20102	RES 1K 0.1W	3357	4822 051 20392	RES 3K9 0.1W
3260	4822 051 20102	RES 1K 0.1W	3358,59	5322 101 11082	V RES 47K
3261	4822 051 20242	RES 2K4 0.1W	3360	4822 051 20183	RES 18K 0.1W
3262	4822 051 20104	RES 100K 0.1W	3361	4822 051 20332	RES 3K3 0.1W
3263	5322 116 80426	RES 100 0.125W	3362	4822 051 20392	RES 3K9 0.1W
3264	5322 116 80443	RES 3K9 0.125W	3363	4822 051 20103	RES 10K 0.1W
3265,66	4822 051 20102	RES 1K 0.1W	3364	4822 051 20105	RES 1M 0.1W
3267	4822 100 11661	V RES 100K	3365	5322 101 11082	V RES 47K
3269	4822 051 20123	RES 12K 0.1W	3366	4822 051 20563	RES 56K 0.1W
3270	4822 051 20103	RES 10K 0.1W	3367-70	5322 101 11082	V RES 47K
3275	5322 116 90218	RES 8K2 0.06W	3371	4822 100 11664	V RES 1K
3276	4822 051 20511	RES 510 0.1W	3372-78	5322 101 11082	V RES 47K
3278	4822 116 90336	RES 100	3379	4822 051 20332	RES 3K3 0.1W
3279	4822 051 20102	RES 1K 0.1W	3380-85	4822 100 11663	V RES 10K
3281	4822 051 20122	RES 1K2 0.1W	3386	4822 051 20332	RES 3K3 0.1W
3282	4822 051 20221	RES 220 0.1W	3387,88	4822 051 20102	RES 1K 0.1W
3283	4822 051 20102	RES 1K 0.1W	3389	4822 051 20104	RES 100K 0.1W
3284	4822 051 20473	RES 47K 0.1W	3390	4822 051 20472	RES 4K7 0.1W
3285	4822 051 20102	RES 1K 0.1W	3391,92	4822 051 20392	RES 3K9 0.1W
3294	4822 051 20511	RES 510 0.1W	3393	4822 051 20222	RES 2K2 0.1W
3295	4822 116 90336	RES 100	3394	4822 051 20102	RES 1K 0.1W
3296	4822 051 20102	RES 1K 0.1W	3395	4822 051 20332	RES 3K3 0.1W
3297	4822 051 20122	RES 1K2 0.1W	3396	4822 051 20102	RES 1K 0.1W
3298,99	4822 051 20123	RES 12K 0.1W	3397	4822 051 20472	RES 4K7 0.1W
3300	4822 051 20103	RES 10K 0.1W	3398	4822 116 90336	RES 100
3301	4822 051 20221	RES 220 0.1W	3399	4822 051 20392	RES 3K9 0.1W
3302,03	4822 051 20102	RES 1K 0.1W	3400-02	4822 051 20102	RES 1K 0.1W
3304	4822 051 20473	RES 47K 0.1W	3403	4822 051 20104	RES 100K 0.1W
3305	4822 100 11661	V RES 100K	3404	4822 111 91504	RES 680
3306	4822 051 20104	RES 100K 0.1W	3405	4822 051 20472	RES 4K7 0.1W
3308	4822 051 20104	RES 100K 0.1W	3406	4822 116 90338	RES 1K5
3311	4822 100 11661	V RES 100K	3407	4822 051 20392	RES 3K9 0.1W
3312	4822 051 20104	RES 100K 0.1W	3408	4822 051 20821	RES 820 0.1W
3313	4822 051 20123	RES 12K 0.1W	3409	4822 051 20222	RES 2K2 0.1W
3314	4822 051 20103	RES 10K 0.1W	3410	4822 051 20102	RES 1K 0.1W
3315	4822 051 20102	RES 1K 0.1W	3412	4822 051 20332	RES 3K3 0.1W

Pos.	Parts code	Description	Pos.	Parts code	Description
3413	4822 111 91499	RES 270 0.06W	3972	4822 051 20103	RES 10K 0.1W
3414	4822 051 20102	RES 1K 0.1W	3973	4822 116 90346	RES 6K8
3415	4822 100 11664	V RES 1K	3976	4822 051 20471	RES 470 0.1W
3416,17	4822 051 20104	RES 100K 0.1W	3977	4822 051 20102	RES 1K 0.1W
3418,19	4822 100 11661	V RES 100K	3978	4822 051 20471	RES 470 0.1W
3420	4822 051 20472	RES 4K7 0.1W	3979	4822 051 20689	RES 68 0.1W
3422	4822 051 20392	RES 3K9 0.1W	3980	4822 111 91504	RES 680
3423	4822 051 20821	RES 820 0.1W	3981	4822 051 20182	RES 1K8 0.1W
3424	4822 051 20222	RES 2K2 0.1W	3982	4822 051 20102	RES 1K 0.1W
3425	4822 051 20102	RES 1K 0.1W	3983	4822 051 20302	RES 3K 0.1W
3426	4822 051 20332	RES 3K3 0.1W	3984	4822 111 91504	RES 680
3428	4822 051 20102	RES 1K 0.1W	3985	4822 051 20272	RES 2K7 0.1W
3429	4822 111 91499	RES 270 0.06W	3986	4822 051 20222	RES 2K2 0.1W
3430,31	4822 100 11664	V RES 1K	3987	4822 116 90338	RES 1K5
3432	4822 051 20393	RES 39K 0.1W	3988	4822 111 91504	RES 680
3433	5322 101 11082	V RES 47K 0.25W	3990	4822 111 91499	RES 270 0.06W
3434	4822 051 20683	RES 68K 0.1W	3991	4822 111 91504	RES 680
3435	4822 051 20223	RES 22K 0.1W	3992	4822 051 20562	RES 5K6 0.1W
3436	5322 101 11082	V RES 47K 0.25W	3993	4822 051 20153	RES 15K 0.1W
3437	4822 051 20473	RES 47K 0.1W	3994	4822 051 20332	RES 3K3 0.1W
3438	5322 101 11082	V RES 47K 0.25W	3995	4822 051 20102	RES 1K 0.1W
3439	4822 051 20273	RES 27K 0.1W	3996	4822 051 20472	RES 4K7 0.1W
3440	4822 100 11663	V RES 10K	3997	4822 100 11663	V RES 10K
3442,43	5322 101 11082	V RES 47K	3998	4822 051 20223	RES 22K 0.1W
3444	4822 100 11663	V RES 10K	3999	4822 051 20102	RES 1K 0.1W
3445	4822 051 20103	RES 10K 0.1W	5053	4822 157 62889	V COILL
3446	4822 051 20102	RES 1K 0.1W	5075	4822 157 62883	COIL 22UH
3447	4822 051 20223	RES 22K 0.1W	5081,82	4822 157 62883	COIL 22UH
3448	4822 051 20332	RES 3K3 0.1W	5205-08	4822 157 62883	COIL 22UH
3449	4822 116 90336	RES 100	5321	4822 157 62883	COIL 22UH
3450	4822 051 20391	RES 390 0.1W	5387	4822 157 62895	L.P.FILTER
3451	4822 111 91504	RES 680	5402	4822 157 62891	L.P.FILTER
3452	4822 051 20689	RES 68 0.1W	5414	4822 157 62888	L.P.FILTER
3453	4822 051 20102	RES 1K 0.1W	5422	4822 157 62883	COIL 22UH
3455	4822 051 20103	RES 10K 0.1W	5428	4822 157 62888	L.P.FILTER
3500	4822 051 20223	RES 22K 0.1W	5432	4822 157 62892	DELAY LINE
3501	4822 051 20474	RES 470K 0.1W	5449	4822 157 62883	COIL 22UH
3539	4822 051 20472	RES 4K 0.1W	5453	4822 157 62887	B.P.FILTER
3540	4822 051 20224	RES 220K 0.1W	6009	5322 130 31928	DIODE BAS16
3541	4822 051 20332	RES 3K3 0.1W	6047	5322 130 32076	DIODE BAT18
3542	4822 051 20562	RES 5K6 0.1W	6048	5322 130 31928	DIODE BAS16
3543	4822 051 20223	RES 22K 0.1W	6049	5322 130 31937	DIODE BZX84-C4V7
3544	4822 111 91499	RES 270 0.06W	6056	5322 130 80119	DIODE BBY40
3545	4822 051 20472	RES 4K7 0.1W	6075	5322 130 31928	DIODE BAS16
3589	4822 051 20222	RES 2K2 0.1W	6077	5322 130 30691	DIODE BAW56
3590	4822 051 20224	RES 220K 0.1W	6101	5322 130 31928	DIODE BAS16
3591	4822 051 20332	RES 3K3 0.1W	6102	5322 130 32731	DIODE BZX84-C3V6
3592	4822 051 20562	RES 5K6 0.1W	6156	5322 130 30691	DIODE BAW56
3593	4822 051 20223	RES 22K 0.1W	6163	5322 130 30691	DIODE BAW56
3594	4822 051 20151	RES 150 0.1W	6170	5322 130 30691	DIODE BAW56
3595	4822 051 20472	RES 4K7 0.1W	6172	5322 130 31928	DIODE BAS16
3700	4822 051 20104	RES 100K 0.1W	6181	5322 130 30691	DIODE BAW56
3701	4822 051 20471	RES 470 0.1W	6183	5322 130 31928	DIODE BAS16
3703	4822 051 20222	RES 2K2 0.1W	6188	5322 130 30691	DIODE BAW56
3710	4822 051 20222	RES 2K2 0.1W	6190	5322 130 31928	DIODE BAS16
3943	4822 100 11664	V RES 1K	6197	4822 130 80125	DIODE BZX84-C5V6
3950	4822 051 20122	RES 1K2 0.1W	6229	4822 130 33703	DIODE BZX84-C2V4
3951	4822 051 20222	RES 2K2 0.1W	6261	5322 130 31928	DIODE BAS16
3955	4822 051 20471	RES 470 0.1W	6306	4822 130 80125	DIODE BZX84-C5V6
3956	4822 051 20122	RES 1K2 0.1W	6432	5322 130 31928	DIODE BAS16
3960	4822 116 90346	RES 6K8	6700	4822 130 33703	DIODE BZX84-C2V4
3961	4822 051 20561	RES 560 0.1W	6971	5322 130 31928	DIODE BAS16
3962	4822 051 20562	RES 5K6 0.1W	7005	5322 130 42718	TR BFS20
3963	4822 051 20103	RES 10K 0.1W	7040	4822 209 60792	IC PC74HC4053T
3964	4822 051 20335	RES 3M3 0.1W	7041	5322 209 71553	IC NE532D
3965	4822 051 20394	RES 390K 0.1W	7048	4822 209 61724	IC HA11899MP
3968	4822 051 20303	RES 30K 0.1W	7060	4822 130 60685	TR BF510
3969	4822 051 20104	RES 100K 0.1W	7061	5322 130 41982	TR BC848B
3970,71	4822 051 20102	RES 1K 0.1W	7063	5322 209 61452	IC N74F175D

Pos.	Parts code	Description	Pos.	Parts code	Description
7064	5322 209 61004	IC N74F74D	7413	5322 130 41982	TR BC848B
7066	4822 209 63446	IC SAA1101T	7421	5322 130 41982	TR BC848B
7070	4822 209 63448	IC PC3521HP	7425	5322 130 41982	TR BC848B
7072	5322 209 12099	IC PC74HC164T	7426,27	5322 130 41983	TR BC858B
7073	5322 130 41982	TR BC848B	7428	4822 209 60449	IC PC74HC04T
7083-85	5322 209 71802	IC PC74HC00T	7432	4822 209 63462	IC CXA1072Q-Z
7086	4822 130 62541	TR BST122	7446	4822 130 42131	TR BF550
7087	5322 130 60601	TR BST80	7447	4822 130 42353	TR BFS19
7088	4822 130 62541	TR BST122	7452	5322 130 41982	TR BC848B
7089	5322 130 60601	TR BST80	7501	5322 130 41983	TR BC858B
7090	4822 209 60792	IC PC74HC4053T	7538,39	5322 130 41982	TR BC848B
7097	4822 130 62541	TR BST122	7541	5322 130 41983	TR BC858B
7098	5322 130 60601	TR BST80	7543	5322 130 41983	TR BC858B
7099	4822 130 62541	TR BST122	7545	5322 130 41982	TR BC848B
7100	5322 130 60601	TR BST80	7588,89	5322 130 41982	TR BC848B
7101	4822 130 62541	TR BST122	7591	5322 130 41983	TR BC858B
7102	5322 130 60601	TR BST80	7593	5322 130 41983	TR BC858B
7103	4822 209 60792	IC PC74HC4053T	7595	5322 130 41982	TR BC848B
7104	4822 130 62541	TR BST122	7700	5322 209 71553	TR NE532D
7105	5322 130 60601	TR BST80	7951	5322 130 41982	TR BC848B
7109	4822 209 60792	IC PC74HC4053T	7956	5322 130 41982	TR BC848B
7110	4822 130 62541	TR BST122	7962	5322 130 41982	TR BC848B
7111	5322 130 60601	TR BST80	7963	5322 130 41982	TR BC848B
7112	4822 130 62541	TR BST122	7968	5322 130 41982	TR BC848B
7113	5322 130 60601	TR BST80	7971	5322 130 41983	TR BC858B
7114	4822 130 62541	TR BST122	7976	5322 130 41982	TR BC848B
7115	5322 130 60601	TR BST80	7977	5322 130 41983	TR BC858B
7132	4822 209 60792	IC PC74HC4053T	7978	4822 130 42131	TR BF550
7140	4822 209 60792	IC PC74HC4053T	7979	4822 130 42353	TR BFS19
7150	4822 209 60792	IC PC74HC4053T	7981	5322 130 41982	TR BC848B
7181	4822 130 60685	TR BF510	7988	5322 130 41982	TR BC848B
7197	5322 130 41983	TR BC858B	7990	5322 130 41982	TR BC848B
7198,99	5322 130 41982	TR BC848B	7995-98	5322 130 41983	TR BC858B
7216	5322 130 41982	TR BC848B	Purple P.W.B.		
7218	5322 130 41982	TR BC848B	2001	4822 126 10002	CAP 100NF 25V
7230	4822 209 60792	IC PC74HC4053T	2002,03		CAP 4N7
7231	4822 209 63441	IC AN2010S	3001	4822 051 20102	RES 1K 0.1W
7235	5322 130 41982	TR BC848B	3002	4822 116 90218	RES 8K2 0.06W
7241	4822 209 63441	IC AN2010S	3003	5322 100 11611	V RES 4K7
7245	5322 130 41982	TR BC848B	3004	4822 051 20472	RES 4K7 0.1W
7251	4822 209 63441	IC AN2010S	3005,06	4822 051 20102	RES 1K 0.1W
7252	5322 130 41982	TR BC848B	3007	4822 051 20332	RES 3K3 0.1W
7261	4822 209 60796	IC SD5402CY	3008	4822 051 20153	RES 15K 0.1W
7271	5322 130 60502	TR BSS83	3009	4822 051 20332	RES 3K3 0.1W
7276	5322 130 60504	TR BCV61	3010	4822 051 20473	RES 47K 0.1W
7281	5322 130 41982	TR BC848B	3011	4822 051 20105	RES 1M 0.1W
7282	4822 209 60795	IC CA3080AM	6001	5322 130 31928	DIODE BAS16
7294	5322 130 41982	TR BC848B	7001,02	5322 130 41983	TR BC858B
7295	5322 130 60504	TR BCV61	7003-06	5322 130 41982	TR BC848B
7300	5322 130 44875	TR BF512	Power supply P.W.B.		
7301	4822 209 60795	IC CA3080AM	2822	4822 124 42063	CAP 33UF 16V
7317	4822 209 60795	IC CA3080AM	2823	4822 124 23556	CAP 10UF 16V
7318	5322 130 60502	IC BSS83	2825	5322 122 34098	CAP 10NF 63V
7319	5322 130 60504	TR BCV61	2826	4822 122 33806	CAP 820PF 63V
7322	5322 130 41982	TR BC848B	2828	4822 124 23555	CAP 47UF 10V
7328,29	5322 130 41982	TR BC848B	2830	4822 124 42063	CAP 33UF 16V
7331	4822 209 63443	IC LA7263M	2834,35	4822 124 23555	CAP 47UF 10V
7332	4822 209 60792	IC PC74HC4053T	2840	4822 124 42063	CAP 33UF 16V
7346	4822 209 60792	IC PC74HC4053T	2851,52	4822 124 42063	CAP 33UF 16V
7355	5322 130 41983	TR BC858B	2856	4822 124 42063	CAP 33UF 16V
7360	5322 130 41983	TR BC858B	2860	5322 122 34098	CAP 10NF 63V
7363	5322 209 14542	IC HEF4066BT	2861	4822 124 23555	CAP 47UF 10V
7380	5322 209 12172	IC PC74HC4052T	2880	4822 124 23556	CAP 10UF 16V
7386	5322 130 41982	TR BC848B	2881	4822 124 23557	CAP 15UF 25V
7387	5322 130 41983	TR BC858B	2882	4822 124 23556	CAP 10UF 16V
7396	5322 130 41983	TR BC858B	2883	4822 124 23558	CAP 10UF 35V
7397,98	5322 130 41982	TR BC848B			
7406	5322 130 41982	TR BC848B			
7411,12	5322 130 41983	TR BC858B			

Pos.	Parts code	Description	Pos.	Parts code	Description
2888	4822 124 23558	CAP 10UF 35V	Electric Viewfinder P.W.B.		
2893	4822 124 23557	CAP 15UF 25V	* CP01	4822 252 20272	CP ICP-N10
3821	4822 051 20102	RES 1K 0.1W	D01	4822 130 32778	DIODE 1SS133
3822	4822 051 20151	RES 150 0.1W	D02	4822 130 81471	DIODE 1SS252
3824	4822 111 91504	RES 680	D03	4822 130 81256	DIODE ERA22-04
3825	4822 051 20103	RES 10K 0.1W	D04	4822 130 81336	DIODE 1SS131
3826	4822 051 20472	RES 4K7 0.1W	D05	4822 130 81797	LED LN28CAL(LRS)
3828,29	4822 051 20472	RES 4K7 0.1W	D06	4822 130 33284	DIODE MA4075-M
3831	4822 116 90346	RES 6K8	D07	4822 130 82386	DIODE MA4043-L
3832	5322 105 20032	V RES 1K	IC01	4822 209 72698	IC BA7125L
3833	4822 051 20622	RES 6K2 0.1W	IC02	4822 209 83184	IC MN4011BS
3834	4822 051 20479	RES 47 0.1W	L03	4822 157 62869	LINEAR COIL
3840	4822 051 20333	RES 33K 0.1W	Q01	4822 130 61664	TR 2SD814-R
3841	4822 051 20163	RES 16K 0.1W	Q02	4822 130 62528	TR 2SD1312
3842	4822 051 20103	RES 10K 0.1W	Q03	4822 130 62527	TR UN5214
3843	4822 051 20102	RES 1K 0.1W	* TF01	4822 252 20269	THERMAL FUSE S1
3845	4822 051 20472	RES 4K7 0.1W	* T01	4822 148 81127	FLYBACK TRANS
3846	4822 051 20102	RES 1K 0.1W	Tools & Jigs		
3847	4822 116 90346	RES 6K8		4822 395 90614	A/CTL HEAD POS. TOOL
3848	4822 051 20102	RES 1K 0.1W		4822 395 50262	ADJ. HANDLE
3850	4822 051 20102	RES 1K 0.1W		4822 395 50365	CHIP PARTS REPL.TOOL
3851	4822 051 20103	RES 10K 0.1W		4822 395 50366	CHIP PARTS REPL.TOOL
3852	5322 105 20032	V RES 1K		4822 395 90612	CHIP IC REPL. TOOL
3853	4822 051 20512	RES 5K1 0.1W		4822 397 60098	Y/C SEPARATOR
3857	4822 051 20151	RES 150 0.1W		4822 395 90615	BACK TENSION CASS.
3858	4822 111 91504	RES 680		4822 397 30193	ALIGNMENT TAPE
3860	4822 051 20103	RES 10K 0.1W		4822 397 30194	ALIGNMENT TAPE S-VHS
3867	4822 051 20472	RES 4K7 0.1W		4822 395 50261	BIT TOOL
3869	4822 051 20472	RES 4K7 0.1W		4822 395 50264	BIT TOOL
3874	4822 051 20562	RES 5K6 0.1W		4822 321 61011	EXTENTION CABLE-1
3875	5322 105 20032	V RES 1K			9550
3876	4822 051 20622	RES 6K2 0.1W		4822 321 61012	EXTENTION CABLE-2
3887,88	4822 051 20222	RES 2K2 0.1W			9550
3889	4822 051 20242	RES 2K4 0.1W		4822 321 61013	EXTENTION CABLE-3
3890	4822 051 20512	RES 5K1 0.1W			9550
3891	4822 051 20622	RES 6K2 0.1W			
3892	5322 105 20032	V RES 1K			
3893	4822 051 20153	RES 15K 0.1W			
5821	4822 157 62884	COIL 100UH			
5822	4822 157 62886	COIL 33UH			
5834	4822 157 62884	COIL 100UH			
5855	4822 157 62884	COIL 100UH			
5857	4822 157 62885	COIL 220UH			
5883	4822 157 62885	COIL 220UH			
6822	4822 130 32245	DIODE BYV10-40			
6823	5322 130 34337	DIODE BAV99			
6834	5322 130 31928	DIODE BAS16			
6849	5322 130 34405	DIODE 1N823			
6857	4822 130 32245	DIODE BYV10-40			
6880	5322 130 34337	DIODE BAV99			
6882	5322 130 34337	DIODE BAV99			
6888	5322 130 34405	DIODE 1N823			
7822	4822 130 62538	TR 2SB1407CL			
7824	5322 209 71807	IC SG3524D			
7830	4822 209 73233	IC MC79L05ACP			
7843	5322 130 41982	TR BC848B			
7845	5322 130 41983	TR BC858B			
7846	5322 130 41982	TR BC848B			
7847	4822 130 40995	TR4			
7848	5322 130 41983	TR BC858B			
7849,50	5322 130 41982	TR BC848B			
7857	4822 130 62538	TR 2SB1407CL			
7859	5322 209 71807	IC SG3524D			
7888	5322 130 41983	TR BC858B			
7890,91	5322 130 41982	TR BC848B			


AC POWER ADAPTER SBC 5406/00
AC POWER ADAPTER SBC 5406/20

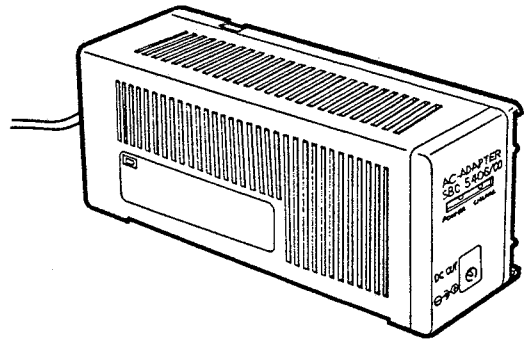

SPECIFICATIONS

Power requirements	: AC 100 – 240 V~, 50/60 Hz
Power consumption	: 30 watts
Output	: DC 12V ===, 1.6A
Charging system	: Constant current, peak detection, timer controlled
Dimensions	: 58 (W) × 74 (H) × 179 (D) mm
Weight	: Approx. 550 g

* Design and specifications are subject to change without notice

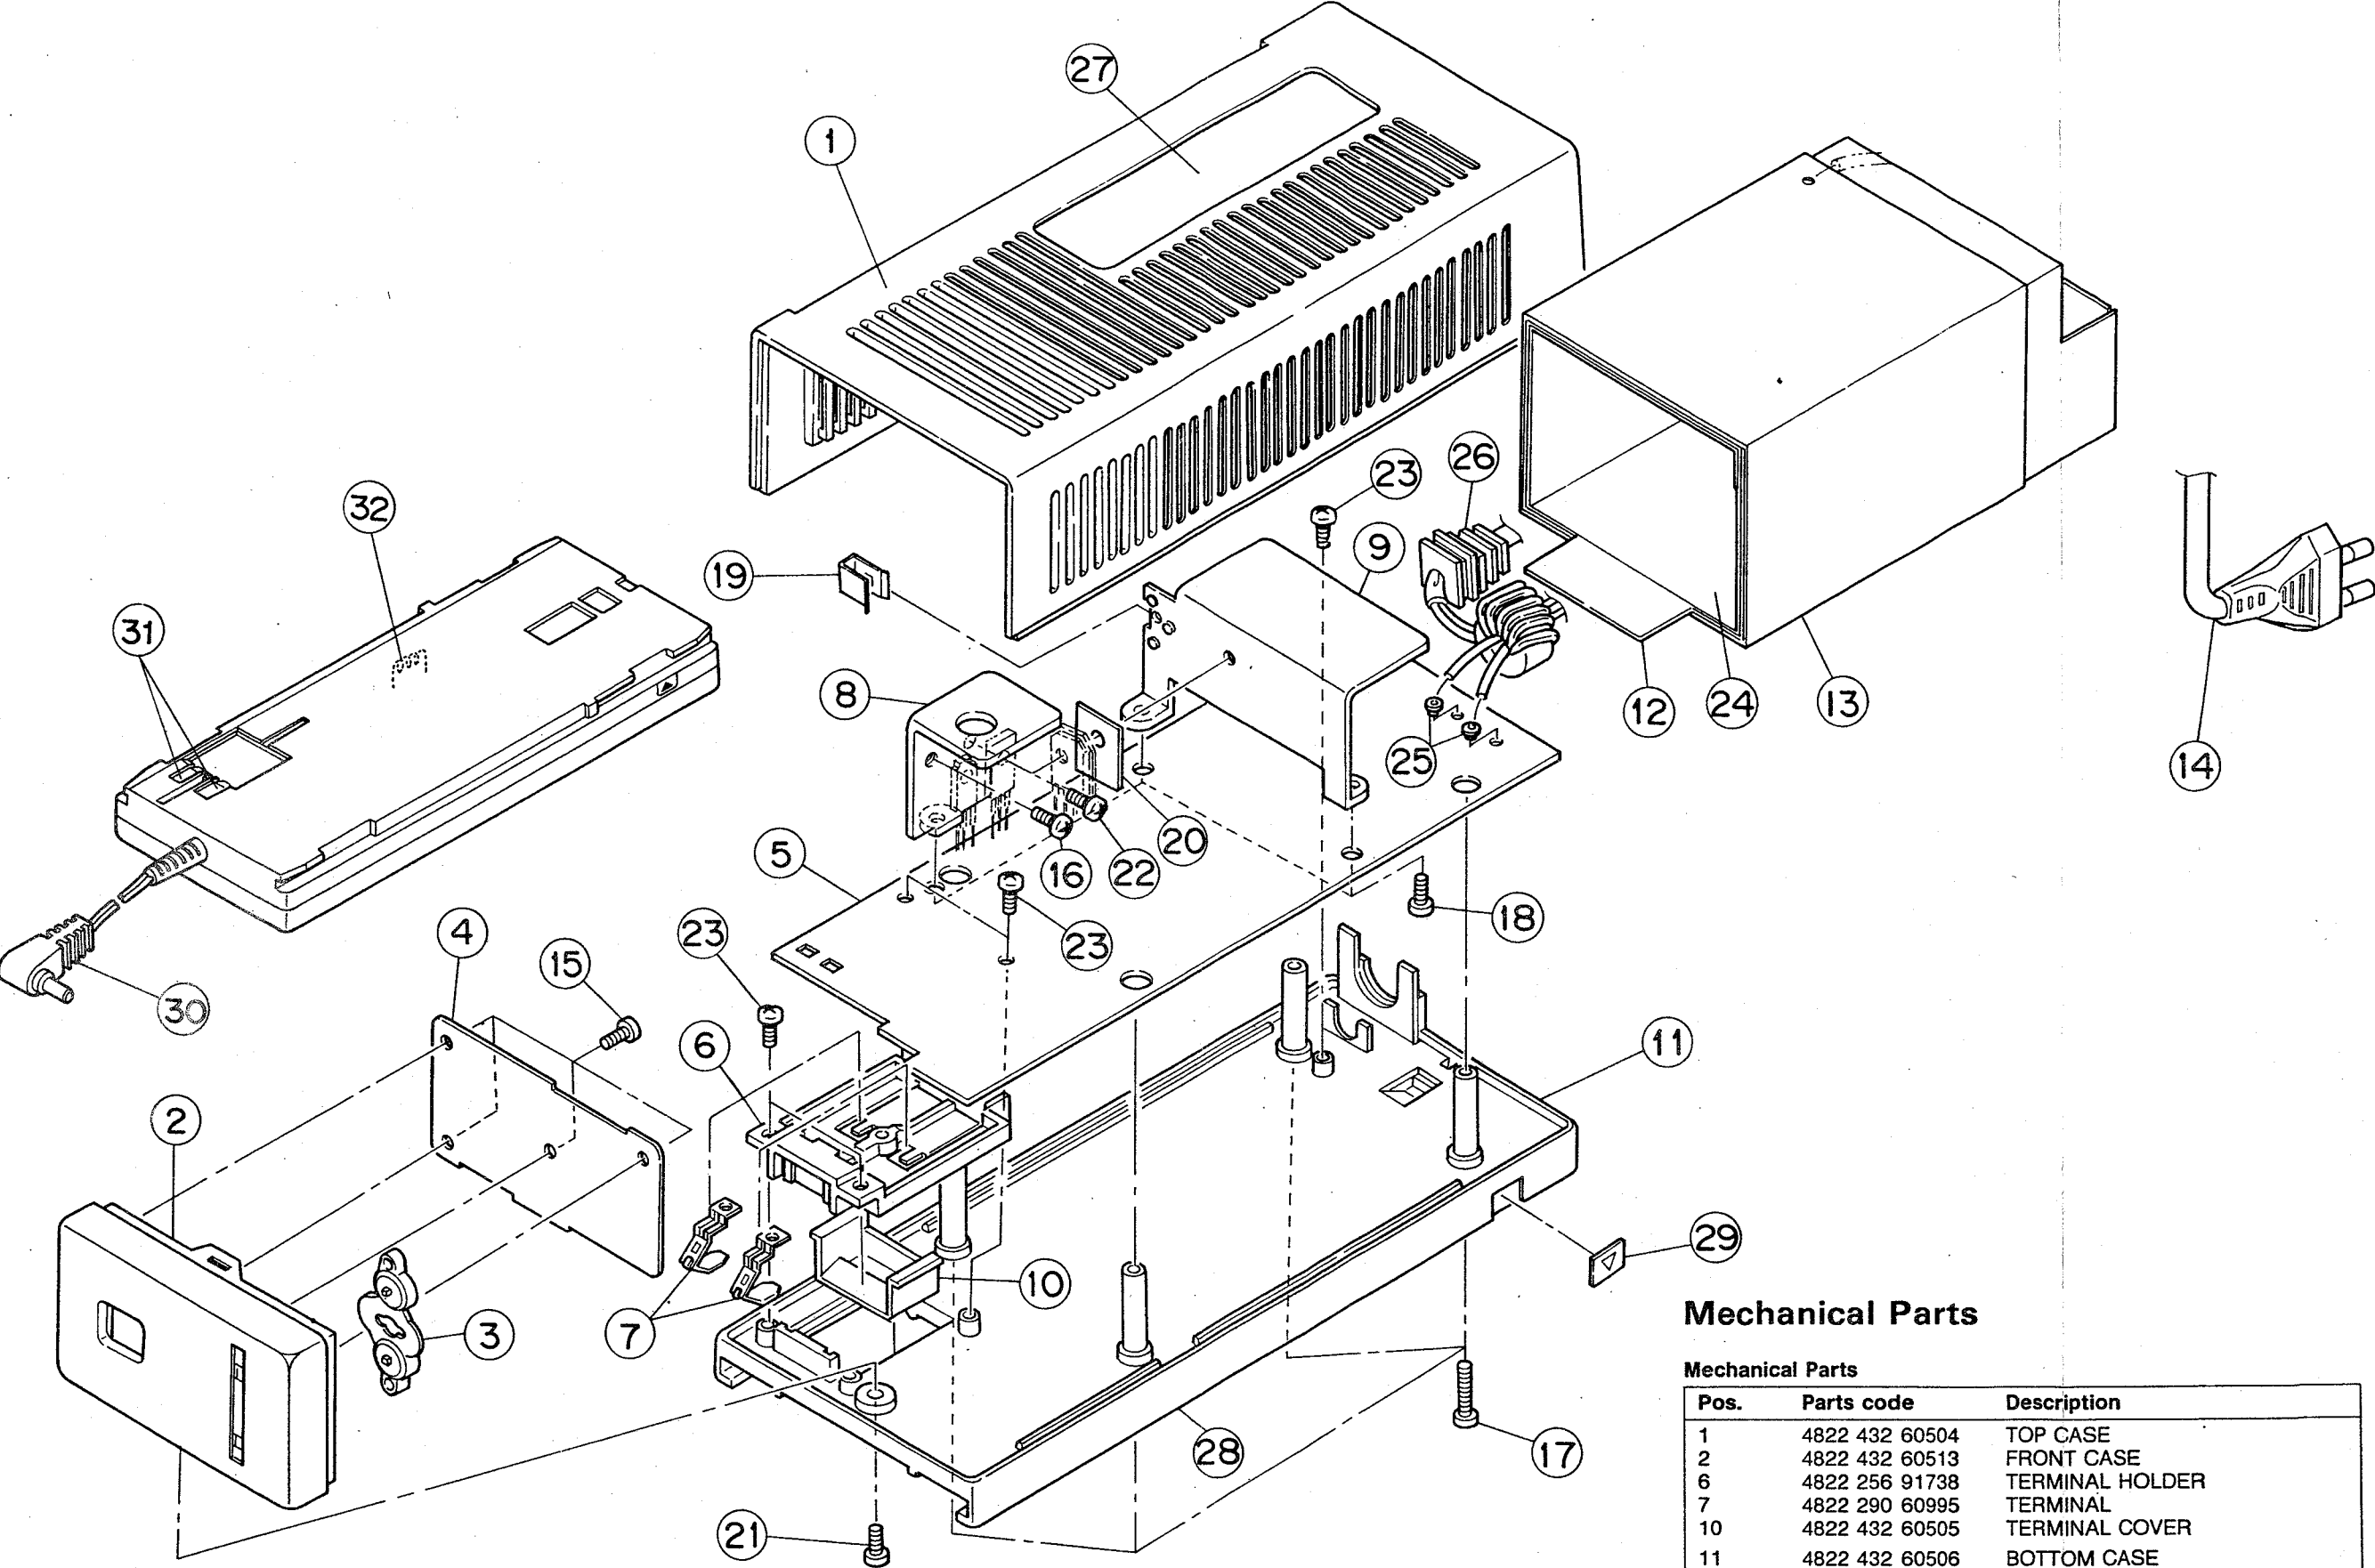

Mechanical Parts

Pos.	Parts code	Description
1	4822 432 60504	TOP CASE
2	4822 432 60513	FRONT CASE
6	4822 256 91738	TERMINAL HOLDER
7	4822 290 60995	TERMINAL
10	4822 432 60505	TERMINAL COVER
11	4822 432 60506	BOTTOM CASE
14	4822 321 61007	AC CABLE
17	4822 502 30291	SCREW 2.6X25 BZ
21	4822 502 30531	SCREW 2.6X8 ZC
30	4822 321 61008	OUTPUT CABLE DC
31	4822 256 91743	TERMINAL
32	4822 157 62868	INDUCTOR

VII. Electrical Parts

AC Adaptor

Pos.	Parts code	Description
* C1,2	4822 121 43825	F CAP 0.22U AC250V
* C3,4	4822 126 11185	C CAP 4700P AC400V
* C5	4822 126 11186	C CAP 4700P AC400V
C7	4822 124 23531	E CAP 150U 400V
C9	4822 124 23532	E CAP 100U 35V
C20	4822 124 23533	E CAP 3300U 25V
C21	4822 124 23534	E CAP 1000U 16V
C22,23	4822 124 23535	E CAP 100U 16V
* C37-39	4822 126 11186	C CAP 4700P AC400
D1	4822 130 82378	DIODE D2SB60
D2	4822 130 82368	DIODE UF1006
D3	4822 130 82369	DIODE SF1004
D4	4822 130 82371	DIODE IN4002
D5	4822 130 82374	DIODE HZ27-1
D6	4822 130 82375	DIODE HZ7A1
D7,8	4822 130 82372	DIODE IN4148
D9	4822 130 82379	DIODE D5LCA20
D10	4822 130 82373	DIODE IN5822
D11	5322 130 81465	DIODE HZ6A1
D12	4822 130 82376	DIODE HZ4A1
D13	4822 130 82371	DIODE IN4002
D14	4822 130 82373	DIODE IN5822
D15	4822 130 82377	VDR Z1015
D16	4822 130 34233	DIODE HZ5C1
D17	4822 130 30862	DIODE HZ9C1
D18,19	4822 130 31274	LED TLR124
* F1	4822 253 30357	FUSE 1A 250V
IC1	4822 209 63366	IC M51977P
IC2	4822 209 72909	IC MB3773
IC3	4822 209 63367	IC M50726-294SP
IC4	4822 209 82205	IC UPC358C
IC5	4822 209 63368	IC UPC353C
IC6	4822 209 73394	IC UPC78L05J
J1	4822 267 31283	JACK DC OUTPUT
* L1	4822 157 62865	INDUCTOR
L2	4822 157 62866	INDUCTOR
L3	4822 157 62867	INDUCTOR
* PHC1	4822 130 82387	PHOTO COUPLER
Q1	4822 130 62531	FET 2SK727
Q2	4822 130 43793	TR 2SC1815
Q3	4822 130 62532	TR 2SA1441
Q4	4822 130 43793	TR 2SC1815
Q5	4822 130 62529	TR AA1L4M
Q6	4822 130 42959	TR 2SA1015
Q7	4822 130 62533	TR 2SB722
R2	4822 111 91978	THERMISTOR 22D-7
R3,4	4822 116 82783	RES 68K 1W
R5	4822 116 82784	RES 68K 1W
* R6	4822 116 82787	FUSE RES 22 1/4W
R8	4822 116 82785	RES 0.33 1W
R25	4822 116 82786	RES 0.22 1W
* R28	4822 116 82788	FUSE RES 10 1/4W
R51	4822 111 41567	RES 820 1/2W
R55	4822 116 90744	POSISTOR
* R56	4822 116 82789	FUSE RES 10 1/4W
* TF1	4822 252 20271	THERMAL CUTOFF
* T1	4822 146 21592	TRANS POWER
VR1	4822 100 11656	VR 2.2KB
X1	4822 242 73878	X-TAL CBS 1000

SAFETY PRECAUTION

Parts identified by the * symbol are critical for safety.
Replace only with specified part numbers.